

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 652 668 A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **94117463.3**

(51) Int. Cl.⁶: **H04N 1/333**

(22) Date of filing: **04.11.94**

(30) Priority: **05.11.93 US 149507**

(43) Date of publication of application:
10.05.95 Bulletin 95/19

(84) Designated Contracting States:
DE FR GB

(71) Applicant: **MICROSOFT CORPORATION**
One Microsoft Way
Redmond,
Washington 98053-6399 (US)

(72) Inventor: **Menezes, Arul**
13930 Northeast 13th Street No.6-2
Bellevue,



Washington 98005 (US)
Inventor: **Mathur, Sharad**
14924 Northeast 76th Court
Redmond,
Washington 98052 (US)
Inventor: **Ginsberg, Michael**
4625-148th Avenue Northeast,
Apartment No.PP102
Bellevue,
Washington 98007 (US)

(74) Representative: **Patentanwälte Grünecker,**
Kinkeldey, Stockmair & Partner
Maximilianstrasse 58
D-80538 München (DE)

(54) **System and method for exchanging computer data processing capabilities.**

(57) A system and method for exchanging data processing capabilities between computers. The computers exchange capabilities so that data transfer between the computers may be made in the most efficient data format possible for the two computers. A first computer, which will receive a data file, sends a list of data processing capabilities to a second computer, which will transmit the data file to the first computer. The transmitting computer examines the capabilities list of the receiving computer as well as its own capabilities list and determines the most efficient data format for the transfer. The transmitting computer may process the data file into an intermediate format for efficient data transfer so that the receiving computer will process the intermediate data file into the desired data format. The capabilities list can be cached for future communication between the computers. The system can update the capabilities list and inform other computers whether their cached capabilities list is current. Capabilities can also be forwarded from one computer to another so that a third computer can determine the capabilities of the first computer from the second computer or the capabilities of the second computer from the first computer. The system is readily applicable to facsimile machines where custom and application data processing capabilities can be exchanged.

EP 0 652 668 A2

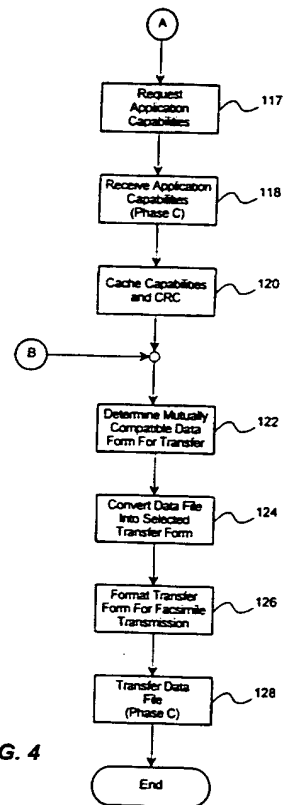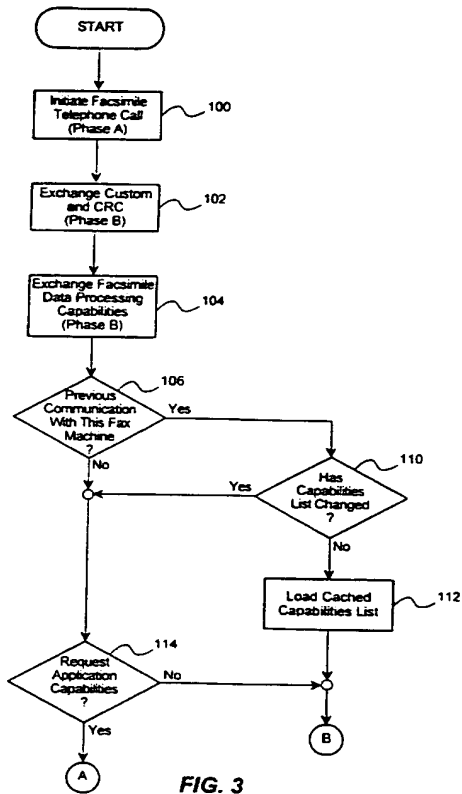

Technical Field

The invention relates generally to a system and method for exchanging information related to data processing capabilities between computers.

Background of the Invention

Computers are commonly used in the workplace for data processing and storage. Access to computer information is a key element in the successful use of computers. Communication between computers has become a critical aspect of access to the computer information. A local area network (LAN) allows several computers to be coupled together to enhance their computing capability. One computer can access information stored in another computer through the LAN. When information is exchanged between two computers, the information must be in a format that the computers can recognize and process. Information is often exchanged in a standard format such as ASCII, for example. However, an ASCII format exchange may require that the information be converted from its original format to ASCII format. The computer transferring information has no way of determining the data processing capabilities of the receiving computer and, therefore, must convert the information to ASCII on the assumption that ASCII is a "universal" format that all computers can recognize.

One form of computer is a facsimile (FAX) machine. A FAX machine may comprise an interface board within a computer, or may be a stand-alone device employing well-known computer technology. FAX machines are used to transfer information from one location to another. FAX machines of older design had little or no computing power and were limited to scanning a page and transmitting a digitized version of the page to a receiving FAX machine that reproduced the page. Modern FAX machines are essentially a form of computer and often have storage capability allowing the FAX machine to scan a document and store the digitized version of the machine for transmission at a later time, such as when telephone rates decrease at night. The receiving FAX machine can store received messages that are confidential and print them out only when the proper identification code is entered.

To minimize transmission time, FAX machines use data compression techniques well known in the art. An international standard for facsimile transmission has been established by the International Telegraph and Telephone Consultative Committee (CCITT) and published as Terminal Equipment and Protocols for Telematic Services (1989). References to CCITT standards are made throughout this disclosure. These standards are well known to those skilled in the art and will not be discussed in detail. To conform to the CCITT standard, all FAX machines have Modified Huffman (MH) encoding capability to compress that digitized data for transmission. Newer FAX machines may also employ MR or MMR encoding techniques to compress the data to a greater extent. The MH and MR data encoding are known as CCITT recommendation T.4 1-dimensional and 2-dimensional encoding, respectively, while the MMR is known as CCITT recommendation T.6 2-dimensional encoding. These data encoding techniques are well known and will not be discussed herein. It is to be understood that reference to a particular encoding capability infers that the particular FAX machine also has the ability to decode that particular data format. For example, a reference to a FAX machine with MMR encoding capability almost always means that the same FAX machine can decode MMR encoded data.

The standardized facsimile data encoding capabilities of a receiving FAX machine are automatically transmitted during what may be termed as the negotiation phase of a facsimile telephone call. The various phases of a facsimile transmission, shown in Figure 1, are described in the CCITT standards.

Phase A, shown in Figure 1, is the call establishment phase in which the telephonic communication is established between a calling station and a called station. The calling station is the station initiating the facsimile telephone call and the called station is the station receiving the facsimile telephone call. As is well known, both the calling station and the called station are able to transmit or receive facsimile messages.

Phase B is a pre-message procedure phase or negotiation phase for identifying and selecting facsimile data encoding capabilities between the calling station and the called station. In phase B, the receiving FAX machine transmits a digital identification signal (DIS) data frame that describes the particular data encoding formats that are recognizable to the receiving FAX machine. The individual data bits of the DIS data frame identify the particular facsimile data processing modes of the receiving FAX machine. The DIS data frame is defined by the CCITT standard and cannot be used for other purposes. As previously discussed, the capabilities include data encoding such as MH, MR, and MMR. The MH, MR, and MMR data encoding capabilities are defined within recommendation T.4 and recommendation T.6 of the CCITT standard. In addition to the identification of data encoding capabilities, the DIS data frame is used to provide information about the basic data processing capabilities of the receiving FAX machine. This may include limited

information such as resolution (e.g., pixels per inch), paper sizes, and the like. These standardized facsimile data processing capabilities or modes are referred to herein as "CCITT encoding formats." The transmitting FAX machine responds with a confirming signal and selects a mutually compatible CCITT encoding format that allows the most efficient data transfer. The transmitting FAX machine encodes the data according to the selected CCITT encoding format and transmits it to the receiving FAX machine.

Phase C is the actual message transfer phase and comprises two simultaneous phases. Phase C1 is the "In-message" procedure phase, which controls the transfer of data between the transmitting FAX machine and the receiving FAX machine. This includes synchronization, error detection and correction, and line supervision. Phase C2 is the actual data transmission phase in which data is transferred by the transmitting FAX machine to the receiving FAX machine under control of the C1 phase. For simplicity, these simultaneous phases will be referred to as phase C.

Phase D is the post-message procedure phase in which information is transferred regarding the end of message signaling, confirmation signaling and end of facsimile signaling. Phase E is the call release phase in which the telephonic communication between the calling station and the called station is terminated.

The CCITT encoding formats permit basic facsimile communication. However, as with computers coupled together by a LAN, FAX machines may have data processing capabilities that can produce more efficient transmission than merely data encoding using one of the limited CCITT encoding formats. Some FAX machines are actually incorporated into computers by way of a FAX interface board. These computers may have great data processing capability, but the data processing capability cannot be called into play when transmitting or receiving a facsimile because one FAX machine does not know what data processing capabilities the other FAX machine possesses.

Therefore, it can be appreciated that there is a significant need for a system and method for communicating information about data processing capabilities between computers.

25 Summary of the Invention

The present invention is embodied in a system for controlling communication between first and second computers, the first computer having at least a first custom data processing mode and the second computer having at least a second custom data processing mode compatible with the first custom data processing mode. The system includes a first application mode storage area in the first computer having a first application data processing mode list containing at least one application data processing mode of the first computer. A second application mode storage area in the second computer has a second application data processing mode list containing at least one application data processing mode of the second computer.

A capability transfer means transfers the first custom and application data processing mode lists from the first computer to the second computer. Selection means within the second computer select a transfer form in which to transfer a data file from the second computer to the first computer. The selection means uses the first and second application mode lists to determine if the transfer form is mutually compatible with the data processing capabilities of the first and second computers. The selection means uses a mutually compatible data processing mode from the first and second custom mode lists if the first and second application mode lists do not have a mutually compatible data processing mode.

The system may further include a conversion processor within the second computer for converting the data file into the transfer form. Communication controllers within the first and second computers control the transfer of the data file in the transfer form from the second computer to the first computer. The second computer may process the data file into an intermediate form based on the first application mode list with the intermediate form being the transfer form. The first computer receives the data file in the intermediate form and further processes it into a final form different from the intermediate form.

The second computer may forward the first application mode list to a third computer upon receipt of a capabilities forwarding request from the third computer. The system may further include a capabilities storage area in the second computer for storing the first application mode list, with the selection means using the stored first application mode list for transfer of subsequent data files from the second computer to the first computer. The system may further include detection means within the second computer to determine if the first application mode list matches the stored first application mode list and generates a detection signal if the lists do not match. The second computer requests the first application mode list from the first computer if the change detection signal is generated. The selection means then uses the first application mode list instead of the stored first extended mode list.

The first custom mode list may be automatically transferred to the second computer. The first application mode list may be transferred to the second computer only upon request.

In an alternative embodiment, the first and second computers are facsimile machines having a facsimile mode storage area containing facsimile data processing modes of the first and second facsimile machines, respectively. Capability transfer means automatically transfer the first facsimile data processing mode list from the first facsimile machine to the second facsimile machine.

5 A custom data processing mode list may be transferred from the first facsimile machine to the second facsimile machine. Selection means within the second facsimile machine select a transfer form in which to transfer a data file from the second facsimile machine to the first facsimile machine. The selection means uses the first and second custom mode lists to determine a mutually compatible transfer form which is compatible with the data processing capabilities of the first and second facsimile machines. The selection
10 means uses a mutually compatible data processing mode from the first and second facsimile mode lists if the first and second custom mode lists do not have a mutually compatible data processing mode.

The system may further include first and second application data processing mode storage areas in the first and second facsimile machines, respectively, each containing an application data processing mode list of application data processing capabilities of the first and second facsimile machines. The capability transfer
15 means transfers the first application data processing mode list from the first facsimile machine to the second facsimile machine upon receipt of an application mode list request command. The selection means within the second facsimile machine selects a mutually compatible transfer form based on the first and second application data processing mode lists, the first and second custom data processing mode lists, and the standard facsimile data processing mode list.

20 Brief Description of the Drawings

Figure 1 illustrates the various standard phases of operation of a conventional machine.

Figure 2 is a functional block diagram of a system according to the present invention.

25 Figure 3 is a flow chart of the operation of the system of Figure 2.

Figure 4 is a continuation of the flow chart of Figure 3.

Figure 5A illustrates conversion of a data file by the system of Figure 2 to an intermediate transfer form.

Figure 5B illustrates multiple conversions of a data file by the system of Figure 2 into a transfer form.

Figure 6 is a flow chart of the registration of a new application by the system of Figure 2.

30 Figure 7 is a block diagram illustrating capabilities forwarding using the system of Figure 2.

Detailed Description of the Invention

The present invention describes a system and method for exchanging information between computers
35 relating to the data processing capabilities of the computers. While the examples provided below are directed to capabilities exchange between FAX machines, the principles of the present invention are applicable to computers other than FAX machines.

The present invention allows the transfer of information between the receiving FAX machine and the transmitting FAX machine regarding the data processing capabilities of the respective FAX machines other
40 than the CCITT standard formats. The FAX machine of the present invention utilizes a custom set of data processing capabilities, or custom capabilities, and a set of application data processing capabilities, or application capabilities that are associated with application programs. The CCITT standard provides the ability to transmit a non-standard facilities (NSF) data frame during the negotiation phase (phase B). The NSF data frame permits greater flexibility in the format of transmitted information. NSF data frames are
45 sometimes used in the prior art to transmit user identification information, passwords, and facsimile relay information. The present invention uses the NSF data frame to transfer a list of the custom data processing capabilities that the receiving FAX machine has at its disposal. The custom capabilities exceed the CCITT standard encoding formats defined in the DIS data frame, and include information about imaging capabilities, polling capabilities, and the like. The custom capabilities will be discussed in detail below.

50 The present invention also has the ability to transfer a list of application data processing capabilities from the receiving FAX machine to the transmitting FAX machine. The application capabilities list may contain such information as the application programs available, such as would be useful if the FAX machines are interface boards in computers. For example, a computer may contain a data spreadsheet, a word processor, a sound board for voice communication, in addition to a FAX board. Application capabilities
55 include data processing information about application programs such as the version number of the program. Application capabilities are exchanged during the data transfer phase (phase C) rather than in the negotiation phase (phase B). Furthermore, application capabilities are exchanged only upon request from the transmitting FAX machine during the data transfer phase (phase C).

The receiving FAX machine indicates the presence of application capabilities in the NSF data frame. The transmitting FAX machine receives the NSF data frame and determines whether or nor to request the application capabilities.

The present invention uses the exchanged custom and application capabilities lists to provide the data in the most appropriate format for transfer from one FAX machine to another. If the data to be transferred is in the form of a spreadsheet, the data can be transferred in that format rather than converting the data to printed pages, scanning the pages and transmitting the data using the standard facsimile data encoding capabilities. For example, the data may be in a format such as the Windows™ Printing System data format, in which data is formatted in predetermined data frames. If the receiving FAX machine has indicated that it can process Windows™ Printing System data frames, the transmitting FAX machine will send the data in that format. As can be readily seen, the ability to determine the precise capabilities of the receiving FAX machine allows the transmitting FAX machine to use the most efficient means for transferring data and permits the transfer of higher level data forms that increase the functionality of the FAX machines.

The present invention is embodied in a system 10, shown in block diagram form in Figure 2. A central processing unit (CPU) 12 is coupled to a memory 14 by a bus 16. The memory 14 may comprise random access memory (RAM) and read only memory (ROM). The bus 16 may carry data signals, control signals and power to the various components of the system 10. A non-volatile storage unit 18 such as a floppy disk or a hard disk may also be coupled to the CPU 12 by the bus 16. A display 20, such as a video display, LCD display, touch-sensitive display, or other display, and a keyboard 22 are coupled to the CPU 12 by the bus 16. Not all of the above described components are required for operation according to the principles of the present invention. For example, if the system 10 is part of a FAX machine, it will be appreciated that there may not be a display 20, and the keyboard 22 may be a telephone style numeric keypad to permit the user to enter the telephone number of the FAX machine to which a facsimile message is being sent. A non-volatile storage unit 18 may also not be present if the system 10 is part of a FAX machine.

The system 10 also contains a custom mode storage area 26 which stores the custom data processing capabilities of the system. An application mode storage area 28 stores a list of application data processing capabilities of the system 10. A capabilities cache 30 stores lists of custom and application capabilities received from other systems of the present design. The capabilities cache 30 also stores a data code associated with the capabilities for each specific receiving FAX machine which is used to indicate whether the stored list accurately reflects the current capabilities of the receiving FAX machine. As will be explained below, the list of stored capabilities can be used for future communication between two systems of the present design. A conversion processor 32 processes a data file into the desired form for data transfer. Operation of the conversion processor 32 to convert a data file from one form to another is well known in the art and will not be described in detail.

A message formatter 34 places the data file and the application capabilities list into the proper format for transfer. In the present embodiment, the data file is "linearized" by the formatter 34. Linearization refers to the process of linking the various component of a facsimile message such as the message sender information, message recipient information, and the data file itself so that the facsimile message components may be placed in one location in the memory 14 to simplify the transmission of the facsimile message. An I/O interface 36 controls the actual transfer from the system 10 to a system of another computer. It can be appreciated that the specific form of the I/O interface 36 depends on the particular application. For example, the system 10 could be part of a FAX machine, in which case the I/O interface 36 is a facsimile modem interface. If the system 10 is part of a computer coupled to other computers on a network, the I/O interface 36 is a local area network (LAN) interface, a serial interface or the like. The present invention is not to be limited to the particular interface or environment in which the system 10 is operating. A physical link 38 couples the system 10 to another system of the same design or to a prior art system. As with the I/O interface 36, the specific form of the physical link 38 depends on the particular application. The physical link 38 may be a wire cable such as a LAN cable or a serial cable or a telephone line. However, the physical link 38 may also be a microwave link or a satellite link if the system 10 is coupled remotely to another computer. If the system 10 is part of a FAX machine, the telephone line coupling one FAX machine to another may also be a wire cable, microwave link, satellite link, or the like. The present invention is not to be limited by the specific form of the physical link 38.

The following description of operation of the system 10 shown in the flow charts of Figures 3 and 4 relate to a FAX machine, however, it should be appreciated that the principles of the present invention are not limited to FAX machines. The flow charts of Figures 3 and 4 are from the perspective of the transmitting FAX machine. The transmitting FAX machine determines the transfer form based on the data processing capabilities of the transmitting and receiving FAX machines. Alternatively, the receiving FAX machine could specify the desired transfer form based on the final data form desired by the receiving FAX machine.

When a facsimile telephone call is first initiated in step 100, shown in Figure 3 (phase A of Figure 1), neither the transmitting nor receiving FAX machine knows the data processing capabilities of the other. This assumes that there has been no previous communication between the transmitting and receiving FAX machines. If there had been previous communication between the transmitting and receiving FAX machines, the custom and application capabilities would have been previously exchanged and stored in the capabilities cache 30 (see Figure 2) of the transmitting FAX machine. If the transmitting FAX machine is initiating the facsimile telephone call, the receiving FAX machine can be identified by the facsimile telephone number. Alternatively, the FAX machines can be identified by identification data (e.g., CSI data frame) exchanged between them in a manner well known and described in the CCITT standards. The system 10 uses the negotiation phase (Phase B of Figure 1) to exchange the list of custom capabilities above and beyond the CCITT encoding formats. In step 102 the custom capabilities are exchanged using the NSF data frames. Note that the custom capabilities are stored in the custom mode storage area 26 (see Figure 2) of the receiving FAX machine. The precise manner of custom capabilities exchange using the NSF data frames will be described below. The custom capabilities are always transmitted by the receiving FAX machine regardless of whether they are actually used or not.

A cyclic redundancy check (CRC) relating to the application capabilities is also transmitted with the custom capabilities in step 102. The user may add data processing capabilities to the system 10 from time to time, which causes the application capabilities CRC to be changed. The application capabilities CRC, which is a form of checksum, is a well-known technique for determining the validity of the stored data. When capabilities are stored in the capabilities cache 30 (see Figure 2), the application capabilities CRC is stored with the capabilities. During a subsequent facsimile communication, the transmitting FAX machine will compare the received application capabilities CRC with the previously stored application capabilities CRC for the receiving FAX machine to determine if the cached capabilities stored within the capabilities cache 30 (see Figure 2) are current. If the stored application capabilities CRC matches the transmitted application capabilities CRC, the capabilities stored in the capabilities cache 30 are current and may be used by the transmitting FAX machine. If the stored application capabilities CRC does not match the transmitted application capabilities CRC, the capabilities stored in the capabilities cache 30 are outdated.

The CCITT encoding formats, such as MH, MR, and MMR, are exchanged in step 102 during the negotiation phase (phase B of Figure 1), as previously described.

In decision 106, the system 10 determines whether there has been previous communication with the receiving FAX machine. As discussed above, the system 10 can determine the identity of the receiving FAX machine from the facsimile telephone number or from the identification data exchanged between the transmitting and receiving FAX machines. If there has been no previous communication with the receiving FAX machine, the result of decision 106 is NO. If there has been previous communication with the receiving FAX machine, the result of the decision 106 is YES, and the system 10, in decision 110, determines if the capabilities lists have changed since the last facsimile communication. The capabilities lists includes both custom capabilities and application capabilities that are stored within the capabilities cache 30 (see Figure 2). The system 10 determines whether the capabilities lists have changed by comparing the application capabilities CRC received with the custom capabilities list in step 104 with the application capabilities CRC stored in the capabilities cache 30 (see Figure 2) for the specific receiving FAX machine.

If the capabilities lists have not changed since the previous communication with the receiving FAX machine, the result of decision 110 is NO, and the system 10 loads the cached capabilities list in step 112. If the capabilities lists have changed, the result of decision 110 is YES.

If the result of decision 106 is NO (i.e., there has been no previous communication with the receiving FAX machine) or the result of decision 110 is YES (i.e., the capabilities list has changed since the last facsimile communication), the system 10, in decision 114, determines whether to request the extended capabilities list. As previously discussed, the custom capabilities list is always sent, but the application capabilities list is only sent upon request from the transmitting FAX machine. The decision to request application capabilities depends on the capabilities of the transmitting FAX machine itself. If the transmitting FAX machine has no application capabilities, there is no need to request the application capabilities list from the receiving FAX machine. If the system 10 does request the application capabilities list, the result of decision 114 is YES, and in step 117, shown in Figure 4, the transmitting FAX machine sends a request for the application capabilities list. In response to the request for the application capabilities list, the receiving FAX machine, in step 118, sends the application capabilities list to the system 10. Note that the application capabilities list is stored in the application mode storage area 28 (see Figure 2) of the receiving FAX machine. If the system 10 does not request the application capabilities list, the result of decision 114 is NO. In that event, or if the system 10 has loaded the cached capabilities list in step 112, the receiving FAX machine does not send the application capabilities list to the system.

If the receiving FAX machine has sent the application capabilities list in step 118, in step 120 the system 10 caches the already received custom capabilities and the application capabilities list in the capabilities cache 30 (see Figure 2) along with the associated application capabilities CRC. As previously indicated, the transmitting FAX machine stores both the custom capabilities list and the application capabilities list within the capabilities cache 30. Storing the custom capabilities list in the capabilities cache 30 allows the transmitting FAX machine to begin processing the data file before a facsimile telephone call is even initiated. For example, if the transmitting FAX machine has a data file formatted for 8.5" x 14" paper and is instructed to send the data file to a receiving FAX machine that can only process 8.5" x 11" paper, the transmitting FAX machine can use this information, which is stored in the capabilities cache 30, to begin scaling the data file for transmission in an 8.5" x 11" format. Thus, the stored capabilities lists permit more efficient data processing and transfer than is possible in the prior art.

In step 122, the system 10 determines the most efficient mutually compatible data form for transfer to the receiving FAX machine. The system selects the mutually compatible data form using the application capabilities list transferred in step 118 or loaded from the capabilities cache 30 (see Figure 2) in step 112, the custom capabilities list exchanged in step 102, or the CCITT encoding formats (MH, MR, or MMR) exchanged in step 104.

Generally speaking, the most efficient transfer form of the data file uses one or more of the custom and/or application capabilities. For example, the transmitting FAX machine may use a custom capability relating to resolution plus a custom capability relating to data compression plus an application capability relating to a particular spreadsheet application program. Thus, the most efficient transfer form of a data file may involve the use of several capabilities.

Prior art FAX machines convert the data file to one of the limited CCITT encoding formats for transmission. However, the capabilities exchange of the system 10 permits transmission in many alternative formats. If the data file is already in a form that can be processed directly by the receiving FAX machine, there is no need to convert the data file to one of the CCITT encoding formats. The data transmission itself is also more efficient because there is not a pixel-by-pixel transmission of the data file as is done with the CCITT encoding formats. The system 10 first determine whether there is a mutually compatible application capability to use as the most efficient transfer form. If there are no mutually compatible application capabilities, the system 10 will then determine whether there are common custom capabilities to use as the most efficient transfer form. The transmitting and receiving FAX machines may not have a mutually compatible data processing mode that allows a more efficient data transfer than the CCITT encoding formats. In that event: the system 10 will use one of the CCITT encoding formats.

The system 10 may use an intermediate data format for the most efficient transfer of data and require that the receiving FAX machine convert the data file into a desired format after it has received the data file. For example, assume that the transmitting FAX machine has a data file stored in a particular format that we shall designate as Form A, shown in Figure 5, and can use its custom and application capabilities to convert the data file from Form A into either of two data formats designated as Form B or Form C, and the receiving FAX machine can use its custom and application capabilities to convert the received data file only from Form B to a data format designated as Form D. The transmitting FAX machine will use its capabilities to convert the data file into Form B as the transfer form and the receiving FAX machine will use its capabilities to convert the received data file from Form B to Form D. Note that the receiving FAX machine may also process the data file in Form B without converting it to Form D. Thus, the system 10 takes the data processing abilities of the transmitting and receiving FAX machine into account when determining the most efficient transfer form for the data file. Similarly, the system 10 may convert the data file more than one time to place the data file into the desired transfer form. For example, if the receiving FAX machine can only process a data file in a format designated as Form G, as shown in Figure 5B, and the transmitting FAX machine can render the data file from its present data format designated as Form E to a data format designated as Form F, or from Form F to Form G, the system 10 will convert the data file two separate times to place the data file into transfer Form G.

In step 124 of Figure 4, the system 10 converts the data file into the selected transfer data form for transmission to the receiving FAX machine. In step 126, the system 10 formats the data file using the linearization process described above. In step 128, the system 10 transfers the data file to the receiving FAX machine.

Custom capabilities are differentiated from application capabilities based on their expected frequency of use and the difficulty in transmitting the respective capabilities lists. For example, a particular data processing format that is frequently used would be included in the custom capabilities list, which is always exchanged. It would be inadvisable to classify a frequently used capability as an application capability because it would be requested so often that the time to request the application capabilities list and actually

transfer it would exceed the time to simply exchange the list in the negotiation phase (phase B in Figure 1). Conversely, if there is a seldom used capability, it is inadvisable to classify it as a custom capability because it is seldom used and it takes time to include it in the custom capabilities list that is always exchanged. Custom capabilities tend to be smaller in size than application capabilities. The compactness of the custom capabilities data permits the transmission of custom capabilities in NSF data frames, which have limited size. In contrast, application capabilities tend to be larger in size and are thus difficult to exchange in NSF data frames. Therefore, application capabilities are exchanged in Phase C of Figure 1. In the presently preferred embodiment, custom capabilities are updated with new revisions in the software that operates the system.

The system 10 does provide a mechanism for an end-user to enter new capabilities into the application capabilities list. As seen in Figure 6, the end-user adds a new application program to the system 10 in step 150. In step 152, the system 10 registers the new capability in the application capabilities list stored in the application mode storage area 28 (see Figure 2). In step 154 the system 10 updates the application capabilities CRC, indicating a change in the capabilities.

According to the principles of the present invention, the capabilities lists can be forwarded from one FAX machine to another. As shown in Figure 7, a first FAX machine transfers its capabilities list to a second FAX machine in the manner described above. The second FAX machine stores the capabilities lists in the capabilities cache 30 (see Figure 2) as previously discussed. The second FAX machine, in response to a request from a third FAX machine, can forward the capabilities list for the first FAX machine from the second FAX machine's capabilities cache 30. This permits the third FAX machine to efficiently communicate with the first FAX machine without having to request the capabilities of the first FAX machine. The system 10 forwards both custom capabilities and application capabilities. There are many well known security provisions that may be included in the FAX machines to prevent the unauthorized forwarding of capabilities. The system 10 will not forward capabilities unless authorized.

As previously discussed, the system 10 uses the CCITT provisions for NSF data frames to transmit the custom capabilities list. While the communication between FAX machines conforms to the CCITT standard commands, the information and data format used by the system 10 is not known in the prior art. After a facsimile telephone call is first initiated (phase A of Figure 1), the system 10 enters the negotiation phase (Phase B of Figure 1). The receiving FAX machine transmits an NSF data frame following the called station identification (CED) signal. According to the principles of the present inventions, the receiving FAX machine containing the system 10 transmits one or more NSF data frames indicating to the transmitting FAX machine that there are custom data processing capabilities beyond the standard facsimile data processing capabilities (*i.e.*, beyond MH, MR, or MMR). The NSF data frames contain information describing the basic capabilities and also contains a data field indicating whether the receiving FAX machine has application capabilities. The NSF data frames also contain the application capabilities CRC described above.

The system 10 attaches the data file (or files if multiple messages are being sent) to the various messaging headers data headers and transmits the facsimile message. The headers and data file are formatted by the message formatter 34 (see Figure 2) into the linearized format. If the system 10 is sending a data file to a Group-3 FAX machine, the system uses the DIS data frame to construct a list of the CCITT encoding formats from the CCITT encoding formats available. If the data files to be sent are all currently in an acceptable CCITT encoding format (MH, MR, or MMR), the system 10 sends the data files in Phase C of Figure 1.

If the system 10 is communicating with a system of the same design, the receiving FAX machine may send one or more NSF data frames containing the custom capabilities list. The DIS data frame, containing the CCITT encoding formats, is also sent at the same time. A non-standard setup (NSS) data frame is used to indicate that a facsimile message that follows is in the linearized format, rather than according to the CCITT standards and the facsimile message employs one or more of the custom or application capabilities.

The system 10 also permits turnaround polling, which is well known in the prior art. With turnaround polling, the transmitting FAX machine requests that the receiving FAX machine transmit a facsimile message. If a turnaround request is transmitted, the transmitting FAX machine sends its custom capabilities list using the non-standard command (NSC) provisions of the CCITT. The format of the NSC is identical to that of the NSF. The NSC may be accompanied by a calling subscriber identification (CIG) and a digital transmit command (DTC) data frame. The DTC data frame is identical in format with the DIS data frame. On subsequent turnarounds, there is no need to exchange custom capabilities again. Therefore, only a minimal NSC is transmitted.

Custom Capabilities Formatting

The encoding scheme chosen for the custom capabilities is a compromise between compactness of data and flexibility. Custom capabilities have been divided into groups of closely related capabilities and each capability group is encoded separately. This permits easier expansion by allowing the deletion of an entire obsolete group and/or adding of new groups and allows full backward and forward compatibility (i.e., systems of the present invention can exchange capabilities from other systems of the same design that have either greater or lesser capabilities. In addition, the NSF (or NSC) data frames may be encrypted by any one of a number of well known data encryption algorithms such as Digital Encryption Standard (DES). This prevents the unauthorized exchange of capabilities and facsimile messages by the system 10 and makes the capability information secure against activities such as line-tapping.

Each capability group has a uniform capability group header beginning with a GroupLength field indicating the number of bytes of the data field to follow. If the capabilities receiver does not understand this group, it can skip over the number of bytes specified in the GroupLength. The GroupLength also allows the capabilities receiver to know when one capabilities group ends and a new capabilities group begins. The GroupLength is followed by a GroupNum data field which provides a unique identification of the particular capabilities group. The remainder of any group capability structure beyond the GroupLength and GroupNum data fields has an arbitrary format and variable length (there must be a whole number of bytes). The format for each group of capabilities varies following the GroupLength and GroupNum data fields. The format of the uniform capability header is shown in Table-1 below

TABLE 1

```

typedef struct
{
    WORD      GroupLength    :6:      //Length of group in bytes incl. this hdr
    WORD      GroupNum       :5:      //one of the GROUPNUM_values
}
BCHDR, near* NPBCHDR, far* LPBCHDR:

```

The GroupLength field is the size, in bytes, of the capability group, including the bytes occupied by the header.

The following Capability Groups are currently defined: Standard, Identifier, Image, Polling Capabilities and Poll Request. These are described in detail below. The extensibility of this encoding scheme also allows other capability groups to be defined. The value of the GroupNum data field for the currently defined capability groups is shown below.

#define GROUPNUM__STD	1
#define GROUPNUM__POLLCAPS	2
#define GROUPNUM__POLLREQ	3
#define GROUPNUM__IMAGE	4
#define GROUPNUM__TEXTID	5

Alternatively, the capability groups could be sent in a predetermined sequence in which the GroupNum data field would not be required.

The format of the Standard Capabilities Group is shown in Table-2 below.

TABLE 2

typedef struct				
5	{			
	WORD	GroupLength	:6;	//length of this group in bytes
	WORD	GroupNum	:5;	//must be GROUPNUM_STD
	WORD	vMsgProtocol	:3;	//version of linearized msgs accepted
	WORD	fBinaryData	:1;	//accepts binary files in linearized msgs
10	WORD	fInwardRouting	:1;	//supports routing of recvd msgs
				//2bytes
	BYTE	vSecurity	:3;	//version of msg security supported
15	BYTE	vMsgCompress	:2;	//version of msg compression supported
	BYTE	Undefined	:3;	//currently undefined/unused
				//3bytes
15	BYTE	OperatingSys	:3;	//which host operating system
	BYTE	vShortFlags	:2;	//how short can V.21 preamble be
	BYTE	vInteractive	:3;	//version of interactive protocol supported
20				//4bytes
	BYTE	DataSpeed	:5;	//Data modem modulations/speeds
				//supported
25	BYTE	DataLink	:3;	//Data-link protocols supported
				//5bytes
}				
BCSTD, near* NPBCSTD, far* LPBCSTD				

The Standard Capabilities Group has the GroupLength and GroupNum data fields as described above. Other data fields indicate the capabilities of the system 10 and the version of software supporting those capabilities. For example, the fInwardRouting data field indicates the ability of the system 10 to route received messages to the final recipient, and the availability of message encryption and compression (and the version of each). Other data fields indicate the host operating system and the support, if any, for short flags, interactive protocols, data modem modulations, and data link protocols.

The version number of various capabilities shown in the data fields in Table 1 are used to indicate the level of support for that particular capability. The data fields that follow the version prefix (a lower case v) are integers using a predefined version data field format. A 00 means that a particular capability is not supported at all. Any integer greater than 00 indicates the level of support. For example, a data value of 1 indicates the first version of the software. A data value of 2 indicates version 2, which supports all aspects of version 2 as well as version 1. Thus, the software supporting the system 10 is upward compatible. A first one of the system 10 may communicate with a second one of the system of the same design if the second system has a version number greater than or equal to the version number of the first system with respect to the particular feature.

It should be noted that the compression data field shown in Table 1 indicates the availability, if any, of data compression methods in addition to CCITT formats (i.e., MH, MR, and MMR). If this data field is 00, indicating that no additional compression capabilities are available, it does not imply that the CCITT encoding formats (i.e., MH, MR, and MMR) are not available. The CCITT encoding formats are described in the DIS, as previously discussed.

The system 10 must be able to cope with variable length data fields. All capability group structures are defined so that a data field value of 00 indicates that a particular group is not supported or is not available. This minimizes the data transmitted by only requiring as little of the group structure be transmitted as necessary. The system 10 will only transmit capabilities up to and including the last non-zero byte. The GroupLength data field is always set to the number of data bytes actually sent and includes the size of the GroupLength and GroupNum data fields. For example, if the receiving FAX machine does not support data modem modulations and data link protocols, it will send only the first four data bytes of the Standard Group to the transmitting FAX machine. The transmitting FAX machine expects a certain number of data bytes for each capability group, based on the version number of the software on the transmitting FAX machine. If an NSF is received by the transmitting FAX machine and the actual number of bytes received is less than the expected length, as indicated by the GroupLength data field, the system 10 sets the missing data bytes to 00 as if the full structure was received with those bytes explicitly set to 00. This situation may occur when

the transmitting FAX machine has a higher software version number than the receiving FAX machine. Thus, the transmitting FAX machine will not use any capabilities beyond what the receiving FAX machine is capable of processing. However, if the GroupLength is greater than the length expected by the transmitting FAX machine, the transmitting FAX machine will ignore the extra bytes. This situation may occur when the receiving FAX machine has a higher software version than the transmitting FAX machine. Thus, the transmitting FAX machine will ignore any capabilities beyond those that it can process.

One of the capability group structures is the Identifier Capability Group, shown in Table 3 below.

TABLE 3

```

10      typedef struct
11      {
12          WORD      GroupLength      :6;      //length of this group in bytes
13          WORD      GroupNum         :5;      //must be GROUPNUM_TEXTID
14          WORD      TextEncoding     :5;      //Text char set
15          BYTE      bTextId[ ];      //2bytes
16                                          //var length text identifier string
17      }
18      BCTEXTID, near* NPBCTEXTID, far* LPBCTEXTID;
19
20

```

The start of the Identifier Capability Group contains the GroupLength and GroupNum data fields previously described. A text identification data field functions as a user identification and may include the name and facsimile telephone number of a remote party. The text identification is arranged so that the transmission order is the same as the left to right order of the bytes in a string as one would read them. This is opposite to the byte order of the CSI, TSI, and CIG frames specified in CCITT recommendation T.30.

A text encoding data field indicates the type of text encoding supported by the system 10. The text encoding data field is used to specify the character set of the text identification. A data value of 000 specifies basic ASCII code, and the remaining values may be used to specify other character sets such as DBCS, UNICODE, or Kanji, as well as various national-language variations of ASCII.

The system 10 also includes an Imaging Capability Group to specify advanced imaging capabilities beyond the standard CCITT recommendation T.30 imaging capabilities. The CCITT recommendation T.30 imaging capabilities are specified in the DIS data frame. The Imaging Capability Group structure is shown in Table 4 below.

TABLE 4

```

typedef struct
{
5      WORD      GroupLength      :6;      //length of this group in bytes
      WORD      GroupNum         :5;      //group number--must be GROUPNUM_IMAGE
      WORD      fAnyWidth        :1;      //page pixel widths don't have to be exactly T.30
      WORD      vRamboVer        :4;      //version of MS resource-based printing format
10                                     //accepted
      BYTE      vCoverAttach     :3;      //version of digital cover pages accepted
      BYTE      vAddrAttach      :2;      //version of address bk attachments accepted
      BYTE      vMetaFile        :2;      //version of GDI metafiles accepted
      BYTE      Undefined1       :1;
15                                     //3bytes
      BYTE      HiResolution     :4;      //Resolutions supported in addition to T.30
      BYTE      HiEncoding       :4;      //Encoding formats supported in addition to T.30
      BYTE      CutSheetSizes:    //4bytes
20                                     //Cut-sheet (not roll) Paper sizes supported
      BYTE      fOddCutSheet     :1;      //5bytes
      BYTE      Undefined2       :7;      //non-standard Cut-sheet sizes also available.
      //6bytes
25 }
      BCIMAGE, far* LPBCIMAGE, near* NPBCIMAGE;

```

The GroupLength and GroupNum fields have been previously described. The various other data fields describe whether page widths may vary slightly from the T.30 standards or must conform exactly. Also the versions, if any, of the Microsoft® Resource-Based Printing Architecture data format that is supported, and of digital cover pages supported. Digital cover pages are rendered to a bit map at the receiver rather than at the sender thus saving transmission time. The data fields also describe the versions, if any, of address book exchange supported, and of GDI (Microsoft® Windows™ Graphics Device Interface) Metafiles that are supported. They also describe advanced resolutions and encoding schemes, if any, supported in addition to the T.30 standard resolutions and encodings. They also describe the available cut-sheet (plain-paper) paper sizes, if any, and specify whether additional non-standard paper sizes are available. Details of these non-standard paper sizes may be obtained by requesting application capabilities, as described above. It should be noted that these parameters may vary depending on the specific FAX machine hardware attached to the system 10. For example, the system 10 may be a portion of a computer having a facsimile interface board and coupled to a laser printer. The resolution and paper size parameters are governed by the laser printer coupled to the computer.

The system 10 also includes a Polling Capability Group that describes the ability of the receiving FAX machine to respond to polling requests. The group structures for the Polling Capability Group are shown in Table 5 below.

TABLE 5

```

5      typedef struct
      {
          WORD      GroupLength      :6;      //length of this group in bytes
          WORD      GroupNum         :5;      //must be GROUPNUM_POLLCAPS
          WORD      fLowSpeedPoll    :1;      //SEP/PWD/NSC poll reqs accepted
10         WORD      fHighSpeedPoll  :1;      //PhaseC pollreqs accepted
          //if both the above 00, poll reqs not accepted
          WORD      fPollByNameAvail :1;      //Poll-by-MessageName msgs available
          WORD      fPollByRecipAvail :1;     //Poll-by-Recipient msgs available
          WORD      fFilePolling     :1;      //Supports polling for arbitrary files
15         //2bytes
          BYTE      fAppCapsAvail    :1;      //Application Capabilities available
          BYTE      fNoShortTurn     :1;      // Cannot recv NSC-DTC after EOM-MCF
          BYTE      vMsgRelay        :3;      //Version of Message Relay support
          BYTE      Undefined        :3;
20         WORD      AppCapsCRC:          //3bytes
          //CRC of machine's Application Capabilities
          //5bytes
      }
      BCPOLLCAPS, far° LPBCPOLLCAPS, near° NPBCPOLLCAPS;

```

25 As with other capability groups, the Polling Capability Group starts with a GroupLength and GroupNum data fields previously described. The Polling Capability Group also includes data fields to indicate the availability of low speed polling, high speed polling, polling by message name, polling by recipient, and polling by file name. The Polling Capability Group also has data fields to indicate the availability of application capabilities, the support (or lack of support) for Fast-Turnaround (described below), and the version of support, if any, for message relaying. The polling capabilities may be limited by security measures such as a password to prevent unauthorized access to data. The Polling Capability Group also includes a data field for the application capabilities CRC for application capabilities previously described. The value in this data field is 00 if there are no registered application capabilities.

35 After the recipient's capabilities have been received, the system 10 determines the optimal communication format and converts the data to be transmitted into the format. It sends the receiving FAX machine a DCS frame indicating the T.30 standard capabilities that are being invoked for this particular transmission. If it is sending a message formatted according to the linearized format it sends in addition an NSS frame. The format of the NSS frame is shown in Table 6 below.

TABLE 6

```

45      typedef struct
      {
          WORD      Group Length      :6;      //length of this group in bytes
          WORD      GroupNum          :5;      //must be GROUPNUM_NSS
          WORD      vMSGProtocol       :3;      //version of linearized msg to follow
          WORD      Undefined1        :2;
50         //2 bytes
          BYTE      vInteractive       :3;      //version of Interactive protocol being invoked
          BYTE      Undefined2        :5;
      }
      BCNSS, far °LPBCNSS, near°NPBCNSS;
55

```

The data fields describe the version of the linearized format being invoked from the linearized message about to be transmitted, or optionally, the version of interactive protocol being invoked.

Following the DCS and NSS, if any, the communication enters Phase-C and the data is transmitted. The data may be in accordance with the T.30 encoding specifications or may be in the linearized format, as previously described. In the linearized form, the data files transmitted by the system 10 may be compressed by a number of known data compression techniques. Similarly, the data files transmitted by the system 10 may be encrypted by a number of well-known encryption algorithms.

Polling

The system 10 has advanced polling features. It allows a user to request a document or file from another of the present design using a document name or a file name. It allows users to request from another of the same design messages that have been addressed to them and are awaiting pickup. It allows Application Capabilities (previously discussed) to be requested, by the user or automatically. Polling can be completed in a call by itself or can be part of a call in which messages are first sent and then polling is initiated. Polling is initiated by causing a turnaround. This is done as follows.

During T.30 operations, the transmitting FAX machine always has control of the communication line. To initiate a poll operation, the transmitting FAX machine must perform a turnaround in which the transmitting and receiving FAX machine exchange roles (i.e., the transmitting FAX machine becomes the receiving FAX machine and the receiving FAX machine becomes the transmitting FAX machine). In the T.30 standard a turnaround may be initiated immediately after receiving a DIS frame. This is adequate when a poll operation is the sole purpose of a call, however, when a poll is to be performed after a send is completed, waiting for this point in the protocol causes a delay of about 6 seconds, increasing the cost of the communications. To solve this problem, the current invention incorporates a "fast turnaround" method described below.

In the T.30 protocol, the normal sequence for turnaround following a page is EOM--MCF--T2 timeout--(NSF)DIS--(NSC)DTC. The fast turnaround method of the system 10 makes use of the fact that the receiver's capabilities have already been received at the start of the call, and therefore there is no need to receive the DIS again. Therefore the sender sends the DTC optionally accompanied by NSC and other optional frames immediately after receiving the MCF, rather than waiting for the T2 timeout (6 seconds as defined in T.30) and the DIS. Therefore the fast turnaround sequence is EOM-MCF-(NSC)DTC, which significantly reduces the turnaround time.

Polling is accomplished by the system 10 as follows. The system 10 sends one or more poll requests to the other machine. Each poll request consists of a document or message name or a file name or a recipient address, and is optionally accompanied by a password. These requests may be sent in linearized form at high speed during the Phase C part of a preceding send, in the case where a poll follows a send in a single call. In the case where there is no preceding send, the poll requests are sent during the turnaround in frames accompanying the DTC. The data fields in the frames are as follows.

Each poll request document or message name, file name or recipient address is sent in an SEP frame. If a request has an associated password, this is sent in a PWD frame immediately following the associated SEP frame. Accompanying the SEP and PWD frames is an NSC frame. The NSC frame is formatted exactly like an NSF (as described above) and contains all of the sender's capabilities. In addition, this NSC contains a Poll Request Group. The format of this group is shown in Table 7 below.

TABLE 7

```

typedef struct
5      WORD      GroupLength      :6:      //length of this group in bytes
      WORD      GroupNum          :5:      //must be GROUPNUM_POLLREQ
      WORD      fReturnControl    :1:      //1=return control when done 0=hangup when done
      WORD      TurnReason        :2:      //poll request or stalling
      WORD      fAppCapsReq       :1:      //Application capabilities req
10     WORD      fLowSpeedPollReq :1:      //SEP/PWD/NSC poll req (SEP/PWD
      //accompanying)
      //2bytes
      BYTE      fHighSpeedPollReq :1:      //PhaseC pollreq preceded this
      BYTE      fPollByNameReq    :1:      //Poll-by-MessageName req
15     BYTE      fPollByRecipReq   :1:      //Poll-by-Recipient req
      BYTE      fFilePollReq      :1:      //arbitrary file poll req
      BYTE      Undefined         :4:      //3bytes
}
20     BCPOLLREQ, far°LPBCPOLLREQ, near°NPBCPOLLREQ;

#define TURN_POLL      0      //poll request
#define TURN_DONE      1      //request completed, control being returned
#define TURN_FAIL      2      //request failed, control being returned
25 #define TURN_WAIT    3      //not yet ready

```

The data fields describe whether the sender requests control of the call back after the poll has completed or whether the call should simply be terminated, also whether the NSC is being sent as part of a poll-request or as part of a stall (described below). The fields also specify whether application capabilities list is being requested, whether the poll request is contained in accompanying SEP and PWD frames (as described above) or was sent in a preceding Phase-C. The data fields also specify whether poll by document-name, poll by recipient-name and/or poll by file name are being invoked.

In response to this turnaround, the receiving FAX machine assumes the role of transmitting FAX machine and transmits the requested information (application capabilities, poll-messages, and/or data files). The system 10 takes appropriate precautionary security measures, such as verifying passwords, before responding to turnaround operations.

Each of the facsimile messages in Phase C can be encapsulated in a binary file transfer (BFT) data frame as described in CCITT recommendation T.434. The data files transmitted by the system 10 may be compressed by a number of well known data compression techniques. In addition, the data files transmitted by the system 10 can be encrypted by a number of well known encryption algorithms.

It is often the case that when a poll request is made, the FAX machine being polled requires some time to locate, retrieve and appropriately format the document, message or file being polled. The T.30 standard makes no provision for this. If a poll response is not received within a limited period of time following turnaround, the connection times out and is terminated. The current invention incorporates a means for a pollee to "stall" the poller while it is retrieving polled data. While applicable to polling the stall mechanism is more generally applicable to all phases and functions of the connection and may be used to stall when a delay is required under other circumstances such as acknowledgment of secure message transmission, acknowledgments of relay instructions, or the like.

A system of the current design stalls by sending a DTC frame accompanied by an NSC frame with the following format. The NSC frame in this case contains the Poll Request Group contain above. The TurnReason data field of the Group is set to the value TURN_WAIT defined above. This indicates that the pollee is processing the request and requires some more time. Upon receiving this frame the poller, a system of this design, replies with a DTC frame accompanied by an NSC which contains the Poll Request Group, and the TurnReason field is set to TURN_POLL. However, the SEP and PWD frames, if any, are not sent a second time. The poller and pollee therefore send NSC-DTC pairs (with the TurnReason field set on to TURN_POLL and TURN_WAIT, respectively) back and forth until the pollee is ready to transmit the response to the request. As a precautionary measure either side may terminate the connection at any time

if the delay becomes excessively long.

Thus, the system 10 permits the use of all of the data processing capabilities that the FAX machines may possess. The examples presented herein relate to facsimile communication. However, it should be noted that the principles of capabilities exchange are applicable to communication between any computers.

5 It is to be understood that even though various embodiments and advantages of the present invention have been set forth in the foregoing description, the above disclosure is illustrative only, and changes may be made in detail, yet remain within the broad principles of the invention. Therefore, the present invention is to be limited only by the appended claims.

10 Claims

1. A system for controlling communication between first and second facsimile machines, the system comprising:
 - 15 a first facsimile mode storage area in the first facsimile machine having a first facsimile data processing mode list containing at least one facsimile data processing mode of the first facsimile machine defined by an industry standard;
 - capability transfer means defined by said standard for transferring said first facsimile data processing mode list from the first facsimile machine to the second facsimile machine;
 - 20 a first custom mode storage area in the first facsimile machine having a first custom data processing mode list containing at least one data processing mode of the first facsimile machine;
 - a second facsimile mode storage area in the second facsimile machine having a second facsimile data processing mode list containing at least one facsimile data processing mode of the second facsimile machine defined by said industry standard, said first and second facsimile data processing mode lists having at least one mutually compatible facsimile data processing mode;
 - 25 a second custom mode storage area in the second facsimile machine having a second custom data processing mode list containing at least one data processing mode of the second facsimile machine; and
 - selection means within the second facsimile machine for selecting a transfer form in which to transfer a data file from the second facsimile machine to the first facsimile machine, said selection means comparing said first and second custom mode lists to determine if there is a custom data processing mode common to both said first and second custom mode lists, said selection means using a mutually compatible data processing mode from said first and second facsimile mode lists if said first and second custom mode lists do not have a common data processing mode.
- 35 2. A system for controlling communication between first and second facsimile machines, the system comprising:
 - a first facsimile mode storage area in the first facsimile machine having a first facsimile data processing mode list containing at least one facsimile data processing mode of the first facsimile machine;
 - 40 capability transfer means for transferring said first facsimile data processing mode list from the first facsimile machine to the second facsimile machine;
 - a first custom mode storage area in the first facsimile machine having a first custom data processing mode list containing at least one data processing mode of the first facsimile machine;
 - a second facsimile mode storage area in the second facsimile machine having a second facsimile data processing mode list containing at least one facsimile data processing mode of the second facsimile machine, said first and second facsimile data processing mode lists having at least one mutually compatible facsimile data processing mode;
 - 45 a second custom mode storage area in the second facsimile machine having a second custom data processing mode list containing at least one data processing mode of the second facsimile machine; and
 - 50 selection means within the second facsimile machine for selecting a transfer form in which to transfer a data file from the second facsimile machine to the first facsimile machine, said selection means comparing said first and second basic mode lists to determine if there is a custom data processing mode common to both said first and second basic mode lists, said selection means using a mutually compatible data processing mode from said first and second facsimile mode lists if said first and second custom mode lists do not have a common data processing mode.
 - 55

3. The system of claim 2, further including a conversion processor in the second facsimile machine for converting said data file into said transfer form.
4. The system of claim 2, further including first and second communication controllers within the first and second facsimile machines, respectively, to control the transfer of said data file from the second facsimile machine to the first facsimile machine.
5. The system of claim 2, further including first and second application data processing mode storage areas in the first and second facsimile machines, respectively, each of said application data processing mode storage areas containing an application data processing mode list of application data processing capabilities of the first and second facsimile machines, respectively, said capability transfer means transferring said first application data processing mode list from the first facsimile machine to the second facsimile machine, and said selection means using said first and second application data processing mode lists to determine if said transfer form is mutually compatible with said application data processing capabilities in said first and second application data processing mode lists.
6. The system of claim 5, further including an application mode list request command, the first facsimile machine transferring said first application mode list to the second facsimile machine upon receipt of said application mode list request command from the second facsimile machine.
7. The system of claim 2, further including:
 - first and second application data processing mode storage areas in the first and second facsimile machines, respectively, each of said application data processing mode storage areas containing an application data processing mode list of application data processing capabilities of the first and second facsimile machines, respectively; and
 - application mode transfer means for transferring said first application mode list from the first facsimile machine to the second facsimile machine in a predetermined format, said selection means selecting a mutually compatible application data processing mode from said first and second application mode lists.
8. The system of claim 7 wherein said predetermined format is a CCITT binary file transfer format.
9. The system of claim 2 wherein the first facsimile machine is initially designated as a receiving facsimile machine and the second facsimile machine is initially designated as a transmitting facsimile machine, the system farther including fast turnaround means in the second facsimile machine for redesignating the first facsimile machine as the transmitting facsimile machine and for redesignating the second facsimile machine as the receiving facsimile machine, said fast turnaround means transmitting a digital transmit command signal to the first facsimile machine immediately after receiving a message confirmation signal from the first facsimile machine indicating the receipt of said data file by the first facsimile machine instead of waiting for a digital identification signal from the first facsimile machine.
10. The system of claim 9 wherein said fast turnaround means transmits a non-standard facilities command signal to the first facsimile machine accompanying said digital transmit command signal to the first facsimile machine.
11. The system of claim 2 wherein the second facsimile machine processes said data file into an intermediate form based on said first custom mode list, said intermediate form being said transfer form, the first facsimile machine receiving said data file in said intermediate form and farther processing said data file into a final form different from said intermediate form.
12. The system of claim 2, farther including mode transfer means for automatically transferring said custom mode list during a negotiation phase of facsimile transmission.
13. The system of claim 12 wherein said mode transfer means uses non-standard facilities (NSF) data frames to transfer said first custom mode list to the second facsimile machine.
14. The system of claim 2 wherein said first custom mode list is transferred to the second facsimile machine in a predetermined format having variable length data fields in at least a first non-standard

facilities (NSF) data frame; said NSF data frame having at least a first capability group, said capability group containing a length data field having a data value indicative of the length of said capability group, an identification data field having a data value indicative of the type of capability, and a variable length data field describing said capability group.

5

15. The system of claim 14, wherein said variable length data field includes at least a first data field containing information relating to the availability of data processing capabilities comprising one of a security mode data field containing data related to the ability to process encrypted messages, a routing data field containing data related to the ability to route received messages, a linearized message data field containing data related to the ability to process linearized messages, a binary data message data field containing data related to the ability to process binary data within said linearized messages, and a compression data field containing data related to the ability to process compressed data beyond said standard facsimile data processing modes.

10

15 16. The system of claim 14 wherein said first capability group includes an identifier capability group containing said length data field, said identification data field, and said variable length data field containing information relating to data text codes available.

17. The system of claim 14 wherein said first capability group includes an imaging capability group containing said length data field, said identification data field, and said variable length data field containing information relating to imaging capabilities of the first facsimile machine above standard facsimile machine imaging capabilities.

20

18. The system of claim 17 wherein said variable length data field includes at least a first data field comprising one of a printer format data field containing data related to the ability to process resource-based printing format data, a cover page data field containing data related to the ability to process digital cover page data, an address book data field containing data related to the ability to process address book data, a metafile data field containing data related to the ability to process metafile data, a compression data field containing data relating to the ability to process compressed data beyond said facsimile data processing modes, a resolution data field containing data relating to the ability to process data having different data resolutions beyond said facsimile data processing modes, an encoding data field containing data relating to the ability to process data having different data encoding modes beyond said facsimile data processing modes, and a paper size data field containing data relating to the ability to process data using different paper sizes beyond said facsimile data processing modes.

30

19. The system of claim 14 wherein said first capability group includes an polling capability group containing said length data field, said identification data field, and said variable length data field containing information relating to polling capabilities of the first facsimile machine.

35

20. The system of claim 19 wherein said variable length data field includes at least a first data field comprising one of a low speed data field containing data related to the ability to process poll requests at low speed, a high speed data field containing data related to the ability to process poll requests at high speed, a name data field containing data related to the ability to process poll requests by message name, a recipient name data field containing data related to the ability to process poll requests by recipient name, a file polling data field containing data related to the ability to process poll requests by file name, and a relay data field containing data related to the ability to relay messages to a third facsimile machine.

45

21. The system of claim 19 wherein said polling capabilities include a data field containing a value indicating a current status of application data processing capabilities within the first facsimile machine.

50

22. A system for transferring data processing capabilities data from a first facsimile machine to a second facsimile machine, the system comprising:

a custom mode storage area in the first facsimile machine having a custom data processing mode list containing at least one data processing mode of the first facsimile machine; and

55

capability transfer means for transferring said custom data processing mode list from the first facsimile machine to the second facsimile machine during a negotiation phase of facsimile transmission, said capability transfer means transferring said first custom mode list to the second facsimile

machine in a predetermined format having variable length data fields in at least a first non-standard facilities (NSF) data frame, said NSF data frame having at least a first capability group, said capability group containing a length data field having a data value indicative of the length of said capability group, and a variable length data field describing said capability group.

- 5
23. The system of claim 22 wherein said NSF data frame is encrypted prior to transmission from the first facsimile machine to the second facsimile machine, the second facsimile decrypting said NSF data frames.
- 10 24. The system of claim 22, further including data fields containing information relating to the availability of facsimile signaling protocols, facsimile turnaround signaling, and data compression beyond said standard facsimile data processing modes.
- 15 25. The system of claim 22 wherein said first capability group includes an identifier capability group containing said length data field, said identification data field, and said variable length data field containing information relating to data text codes available.
- 20 26. The system of claim 22 wherein said first capability group includes an imaging capability group containing said length data field and said variable length data field containing information relating to imaging capabilities of the first facsimile machine beyond industry standard facsimile machine imaging capabilities.
- 25 27. The system of claim 26 wherein said variable length data field includes at least a first data field comprising one of a printer format data field containing data related to the ability to process resource-based printing format data, a cover page data field containing data related to the ability to process digital cover page data, an address book data field containing data related to the ability to process address book data, a metafile data field containing data related to the ability to process metafile data, a compression data field containing data relating to the ability to process compressed data beyond said facsimile data processing modes, a resolution data field containing data relating to the ability to process data having different data resolutions beyond said facsimile data processing modes; an encoding data field containing data relating to the ability to process data having different data encoding modes beyond said facsimile data processing modes, and a paper size data field containing data relating to the ability to process data using different paper sizes beyond said facsimile data processing modes.
- 30
- 35 28. The system of claim 22 wherein said first capability group includes an polling capability group containing said length data field said variable length data field containing information relating to polling capabilities of the first facsimile machine.
- 40 29. The system of claim 28 wherein said variable length data field includes at least a first data field comprising one of a low speed data field containing data related to the ability to process poll requests at low speed, a high speed data field containing data related to the ability to process poll requests at high speed, a name data field containing data related to the ability to process poll requests by message name, a recipient name data field containing data related to the ability to process poll requests by recipient name, a file polling data field containing data related to the ability to process poll requests by file name, and a relay data field containing data related to the ability to relay messages to a third facsimile machine.
- 45
- 50 30. The system of claim 28 wherein said polling capabilities include a data field containing a value indicating the current status of application data processing capabilities within the first facsimile machine.
- 55 31. The system of claim 22, wherein said variable length data field includes at least a first data field containing information relating to the availability of data processing capabilities comprising one of a security mode data field containing data related to the ability to process encrypted messages, a routing data field containing data related to the ability to route received messages, a linearized message data field containing data related to the ability to process linearized messages, a binary data message data field containing data related to the ability to process binary data within said linearized messages, and a compression data field containing data related to the ability to process compressed data beyond said

standard facsimile data processing modes.

32. A system for controlling communication between first and second computers, the system comprising:
- a first custom mode storage area in the first computer having a first custom data processing mode list containing at least one basic data processing mode of the first computer;
 - a first application mode storage area in the first computer having a first application data processing mode list containing at least one application data processing mode of the first computer;
 - a second custom mode storage area in the second computer having a second custom data processing mode list containing at least one custom data processing mode of the second computer, said first and second custom data processing mode lists having at least one mutually compatible custom data processing mode;
 - a second application mode storage area in the second computer having a second application data processing mode list containing at least one application data processing mode of the second computer;
 - capability transfer means for transferring said first custom data processing mode list and said first application data processing mode list from the first computer to the second computer; and
 - selection means within the second computer for selecting a transfer form in which to transfer a data file from the second computer to the first computer, said selection means using said first and second application data processing mode lists to determine if said transfer form is mutually compatible with said data processing capabilities of the first and second computers, said selection means using a mutually compatible data processing mode from said first and second custom data processing mode lists if said first and second application data processing mode lists do not have a mutually compatible data processing mode.
33. The system of claim 32, further including a conversion processor in the second computer for converting said data file into said transfer form.
34. The system of claim 32, further including first and second communication controllers within the first and second computers, respectively, to control the transfer of said data file from the second computer to the first computer.
35. A system for controlling communication between first and second computers, the first computer having at least a first custom data processing mode, the second computer having at least a second custom data processing mode compatible with the first custom data processing mode, the system comprising:
- a first application mode storage area in the first computer having a first application data processing mode list containing at least one application data processing mode of the first computer;
 - a second application mode storage area in the second computer having a second application data processing mode list containing at least one application data processing mode of the second computer;
 - capability transfer means for transferring said first application data processing mode list from the first computer to the second computer; and
 - selection means within the second computer for selecting a transfer form in which to transfer a data file from the second computer to the first computer, said selection means using said first and second application data processing mode lists to select said transfer form that is mutually compatible with said data processing capabilities of the first and second computers, said selection means using a mutually compatible data processing mode from the first and second custom data processing modes if said first and second application data processing mode lists do not have a mutually compatible data processing mode.
36. A system for controlling the exchange of data processing capabilities data between first and second computers, comprising:
- a first custom mode storage area in the first computer having a first custom data processing mode list containing at least one custom data processing mode of the first computer;
 - a second custom mode storage area in the second computer having a second custom data processing mode list containing at least one custom data processing mode of the second computer;
 - capability transfer means for transferring said first custom data processing mode list from the first computer to the second computer; and
 - selection means within the second computer for selecting a transfer form in which to transfer a data file from the second computer to the first computer, said selection means using said first and second custom data processing mode lists to select said transfer form that is mutually compatible with said

data processing capabilities of the first and second computers.

37. The system of claim 36, further including a conversion processor in the second computer for converting said data file into said transfer form.
- 5 38. The system of claim 36, further including first and second communication controllers within the first and second computers, respectively, to control the transfer of said data file from the second computer to the first computer.
- 10 39. The system of claim 36 wherein the second computer processes said data file into an intermediate form based on said first custom mode list, said intermediate form being said transfer form, the first computer receiving said data file in said intermediate form and further processing said data file into a final form different from said intermediate form.
- 15 40. The system of claim 36 wherein the second computer forwards said first custom mode list to a third computer upon receipt of a capabilities forwarding request from said third computer.
41. The system of claim 36, further including a capabilities cache storage area in the second computer for storing said first custom mode list, said selection means using said stored first custom mode list for the subsequent transfer of data files from the second computer to the first computer.
- 20 42. The system of claim 41, farther including change detection means within the second computer to determine if said first custom mode list matches said stored first custom mode list and generating a change detection signal if said first custom mode list does not match said stored first custom mode list, the second computer requesting said first custom mode list from the first computer if said change detection signal is generated, said selection means using said first custom mode list instead of said stored first custom mode list.
- 25 43. The system of claim 42 wherein said change detection means uses a cyclic redundancy check transferred from the first computer to the second computer before said selection means selects said transfer form.
- 30 44. The system of claim 42 wherein said change detection means uses a checksum value transferred from the first computer to the second computer before said selection means selects said transfer form.
- 35 45. The system of claim 36, further including registration means for registering a new data processing mode on the first computer, said registration means adding said new data processing mode to said first custom mode list.
- 40 46. The system of claim 45 wherein said registration means generates a change signal indicating that said new data processing mode has been added to said first custom mode list.
47. The system of claim 46, farther including a capabilities cache storage area in the second computer for storing said first custom mode list, said selection means using said stored first custom mode list for the subsequent transfer of data files from the second computer to the first computer.
- 45 48. The system of claim 45, further including change detection means within the second computer to detect said change signal, the second computer requesting said first custom mode list from the first computer if said change signal is detected, said selection means using said first custom mode list instead of said stored first application mode list.
- 50 49. The system of claim 48 wherein said change detection means uses a cyclic redundancy check transferred from the first computer to the second computer before said selection means selects said transfer form.
- 55 50. The system of claim 48 wherein said change detection means uses a checksum value transferred from the first computer to the second computer before said selection means selects said transfer form.

51. The system of claim 36 wherein the first and second computers are portions of first and second facsimile machines, said first facsimile machine being a receiving facsimile machine and said second facsimile machine being a transmitting facsimile machine, said data file being a facsimile message.
- 5 52. The system of claim 51 wherein said first custom mode list is automatically transferred in a negotiation phase before the transmission of said facsimile message.
53. The system of claim 52 wherein said capability transfer means transfers said first custom mode list to said second facsimile machine using at least a first non-standard facilities (NSF) data frame containing
10 at least a first capability group, each capability group containing a length data field indicating the length of said capability group.
54. The system of claim 53 wherein said first capability group contains a descriptor data field describing
15 said capability group.
55. The system of claim 54 wherein said first capability group includes an identifier capability group containing said length data field, said identification data field, and said descriptor data field containing information relating to data text codes available.
- 20 56. The system of claim 54 wherein said descriptor data field includes at least a first data field containing information relating to the availability of data processing capabilities comprising one of a security mode data field containing data related to the ability to process encrypted messages, a routing data field containing data related to the ability to route received messages a linearized message data field containing data related to the ability to process linearized messages, a binary data message data field
25 containing data related to the ability to process binary data within said linearized messages, and a compression data field containing data related to the ability to process compressed data beyond said standard facsimile data processing modes.
57. The system of claim 54 wherein said first capability group includes an imaging capability group
30 containing said length data field and said descriptor data field containing information relating to imaging capabilities of said first facsimile machine abode standard facsimile machine imaging capabilities.
58. The system of claim 57 wherein said descriptor data field includes at least a first data field comprising one of a printer format data field containing data related to the ability to process resource-based
35 printing format data, a cover page data field containing data related to the ability to process digital cover page data, an address book data field containing data related to the ability to process address book data, a metafile data field containing data related to the ability to process metafile data, a compression data field containing data relating to the ability to process compressed data beyond said facsimile data processing modes, a resolution data field containing data relating to the ability to process
40 data having different data resolutions beyond said facsimile data processing modes, an encoding data field containing data relating to the ability to process data having different data encoding modes beyond said facsimile data processing modes, and a paper size data field containing data relating to the ability to process data using different paper sizes beyond said facsimile data processing modes.
- 45 59. The system of claim 54 wherein said first capability group includes an polling capability group containing said length data field, said identification data field, and said descriptor data field containing information relating to polling capabilities of said first facsimile machine.
- 50 60. The system of claim 59 wherein said descriptor data field includes at least a first data field comprising one of a low speed data field containing data related to the ability to process poll requests at low speed, a high speed data field containing data related to the ability to process poll requests at high speed, a name data field containing data related to the ability to process poll requests by message name, a recipient name data field containing data related to the ability to process poll requests by
55 recipient name, a file polling data field containing data related to the ability to process poll requests by file name, and a relay data field containing data related to the ability to relay messages to a third facsimile machine.

61. The system of claim 59 wherein said polling capabilities include a data field containing a value indicating the current status of application capabilities within said first facsimile machine.
- 5 62. The system of claim 51 wherein said second facsimile machine forwards said first custom data processing mode list to a third facsimile machine upon receipt of a capabilities forwarding request from said third facsimile machine.
- 10 63. The system of claim 51, further including a capabilities cache storage area in said second facsimile machine for storing said first custom mode list, said selection means using said stored first custom mode list for the transfer of subsequent data files from said second facsimile machine to said first facsimile machine.
- 15 64. The system of claim 51, further including:
first and second application mode storage areas in said first and second facsimile machines, respectively, said first and second application mode storage areas containing first and second application data processing mode lists, respectively;
application capability transfer means for transferring said first application data processing mode list from the first facsimile machine to the second facsimile machine, said selection means using said first and second data processing mode lists to select said transfer form that is mutually compatible with said
20 application data processing capabilities of said first and second facsimile machines.
65. The system of claim 64 wherein said first application mode list is transferred in a message transmission phase before the transmission of said facsimile message.
- 25 66. The system of claim 64 wherein said second facsimile machine forwards said first application mode list to a third facsimile machine upon receipt of a capabilities forwarding request from said third facsimile machine.
- 30 67. The system of claim 64, further including a capabilities cache storage area in said second facsimile machine for storing said first application mode list, said selection means using said stored first application mode list for the transfer of subsequent data files from said second facsimile machine to said first facsimile machine.
- 35 68. The system of claim 67, further including change detection means within said second facsimile machine to determine if said first application mode list matches said stored first application mode list and generating a change detection signal if said first application mode list does not match said stored first application mode list, said second facsimile machine requesting said first application mode list from said first facsimile machine if said change detection signal is generated, said selection means using said first application mode list instead of said stored first application mode list.
- 40 69. The system of claim 68 wherein said change detection means uses a cyclic redundancy check transferred from said first facsimile machine to said second facsimile machine before said selection means selects said transfer form.
- 45 70. The system of claim 68 wherein said change detection means uses a checksum value transferred from said first facsimile machine to said second facsimile machine before said selection means selects said transfer form.
- 50 71. The system of claim 64, further including registration means for registering a new data processing mode, said registration means adding said new data processing mode to said first application mode list.
72. The system of claim 71 wherein said registration means generates a change signal indicating that said new data processing mode has been added to said first application mode list.
- 55 73. The system of claim 71, farther including a capabilities cache storage area in said second facsimile machine for storing said first application mode list, said selection means using said stored first application mode list for the transfer of subsequent data files from said second facsimile machine to said first facsimile machine.

74. The system of claim 73, farther including change detection means within said second facsimile machine to detect said change signal, said second facsimile machine requesting said first application mode list from said first facsimile machine if said change signal is detected, said selection means using said first application mode list instead of said stored first application mode list.
- 5 75. The system of claim 74 wherein said change detection means uses a cyclic redundancy check transferred from said first facsimile machine to said second facsimile machine before said selection means selects said transfer form.
- 10 76. The system of claim 74 wherein said change detection means uses a checksum value transferred from said first facsimile machine to said second facsimile machine before said selection means selects said transfer form.
77. A system for controlling turnaround operations between facsimile machines, the system comprising:
 15 first and second facsimile machines, the first facsimile machine initially being designated as a receiving facsimile machine and the second facsimile machine initially being designated as the transmitting facsimile machine; and
 turnaround delay means in said first and second facsimile machines for permitting a delay in the response to the turnaround operation request, said turnaround delay means in said second facsimile machine transmitting a non-standard facilities command and digital transmit command signals to said
 20 first facsimile machine, said turnaround delay means in said first facsimile machine, in response to receipt of said non-standard facilities command signal and said digital transmit command signal from the first facsimile machine, transmitting said non-standard facilities command signal and said digital transmit command signal to said second facsimile machine, said non-standard facilities command signal transmitted by said turnaround delay means in said first facsimile machine having a data field indicating a delay request by said first facsimile machine.
78. The system of claim 77 wherein said turnaround delay means in said first and second facsimile machines continue to exchange said non-standard facilities command signal and said digital transmit command signal with said data field indicating a delay request by said first facsimile machine until said
 30 first facsimile machine is ready to respond to the turnaround operation.
79. The system of claim 77 wherein the turnaround operation request is a polling request for a facsimile message, said facsimile message is identified by an identifier comprising one of a message name, a file name, and a recipient name.
- 35 80. The system of claim 77 wherein said first facsimile machine contains a password list of authorized passwords, the system further including password means for transmitting a password data signal from said second facsimile machine to said first facsimile machine accompanying the turnaround operation request, said first facsimile machine responding to the turnaround operation request only if said password data signal matches one of said authorized passwords.
- 40 81. A method for use in facsimile communication between first and second facsimile machines for controlling turnaround operations, the first facsimile machine initially being designated as a receiving facsimile machine and the second facsimile machine initially being designated as the transmitting facsimile machine, the method comprising the steps of:
 (a) transmitting a non-standard facilities command signal from the second facsimile machine to the first facsimile machine;
 (b) transmitting a digital transmit command signal from the second facsimile machine to the first
 50 facsimile machine;
 (c) in response to said non-standard facilities command signal and said digital transmit command signal from the second facsimile machine, transmitting said non-standard facilities command signal and said digital transmit command signal from the first facsimile machine to the second facsimile machine, said non-standard facilities command signal having a data field indicating a delay request
 55 by the first facsimile machine;
 (d) repeating steps (a) to (c) until the first facsimile machine is ready to respond to the turnaround operation; and

(e) when the first facsimile machine is ready to respond to the turnaround operation, transmitting a signal to indicate that the first facsimile machine is ready to respond to the turnaround operation.

82. The method of claim 81 wherein said digital transmit command signal is a CCITT DTC data frame.
83. The method of claim 81 wherein said non-standard facilities command signal is a CCITT NSC data frame.
84. The method of claim 81 wherein said step (e) includes the transmission of a non-standard setup signal and a digital transmit signal.
85. A method using first and second facsimile machines for controlling communication between the first and second facsimile machines, the method comprising the steps of:
 - (a) transferring a first facsimile data processing mode list from the first facsimile machine to the second facsimile machine, said first facsimile data mode list containing at least one facsimile data processing mode of the first facsimile machine;
 - (b) transferring a first custom data processing mode list from the first facsimile machine to the second facsimile machine, said first custom mode list containing at least one data processing mode of the first facsimile machine;
 - (c) comparing said first custom mode list with a second custom data processing mode list stored in the second facsimile machine and containing at least one custom data processing mode of the second facsimile machine to determine if there is a custom data processing mode common to both said first and second custom mode lists;
 - (d) if there is a common custom data processing mode, transferring a data file from the second facsimile machine to the first facsimile machine using said common data processing mode selected from said first and second custom mode lists;
 - (e) if there is no common data processing mode in said first and second custom mode lists, comparing said first facsimile mode list with a second facsimile data processing mode list stored in the second facsimile machine and containing at least one facsimile data processing mode of the second facsimile machine, said first and second facsimile mode lists having at least one mutually compatible facsimile data processing mode; and
 - (f) transferring said data file from the second facsimile machine to the first facsimile machine in said mutually compatible data form selected from said first and second facsimile mode lists.
86. The method of claim 85 for controlling turnaround facsimile operations, the first facsimile machine initially being the receiving facsimile machine and the second facsimile machine initially being the transmitting facsimile machine, the method comprising the steps of:
 - receiving a message confirmation signal from the first facsimile machine indicating the receipt of said data file by the first facsimile machine; and
 - transmitting a digital transmit command signal to the first facsimile machine immediately after instead of waiting for a digital identification signal from the first facsimile machine.
87. The method of claim 85 wherein said first custom mode list is transferred using at least a first non-standard facilities (NSF) data frame containing at least a first capability group, each capability group containing a length data field indicating the length of said capability group.
88. The method of claim 87 wherein said first capability group contains a descriptor data field describing said capability.
89. The method of claim 88 wherein said first descriptor data field includes at least a first data field containing information relating to the availability of data processing capabilities comprising one of a security mode data field containing data related to the ability to process encrypted messages, a routing data field containing data related to the ability to route received messages, a linearized message data field containing data related to the ability to process linearized messages, a binary data message data field containing data related to the ability to process binary data within said linearized messages beyond said standard facsimile data processing modes.

90. The method of claim 88 wherein said first capability group includes an identifier capability group containing said length data field and said descriptor data field containing information relating to data text codes available.
- 5 91. The system of claim 91 wherein said first capability group includes an imaging capability group containing said length data field and said descriptor data field containing information relating to imaging capabilities of the first facsimile machine above standard facsimile machine imaging capabilities.
- 10 92. The method of claim 91 wherein said descriptor data field includes at least a first data field comprising one of a printer format data field containing data related to the ability to process resource-based printing format data, a cover page data field containing data related to the ability to process digital cover page data, an address book data field containing data related to the ability to process address book data, and a metafile data field containing data related to the ability to process metafile data.
- 15 93. The system of claim 88 wherein said first capability group includes a polling capability group containing said length data field, and said descriptor data field containing information relating to polling capabilities of the first facsimile machine.
- 20 94. The system of claim 93 wherein said descriptor data field includes at least a first data field comprising one of a low speed data field containing data related to the ability to process poll requests at low speed, a high speed data field containing data related to the ability to process poll requests at high speed, a name data field containing data related to the ability to process poll requests by message name, a recipient name data field containing data related to the ability to process poll requests by recipient name, a file polling data field containing data related to the ability to process poll requests by file name, and a relay data field containing data related to the ability to relay messages to a third facsimile machine.
- 25 95. The method of claim 85, further including the steps of:
transferring a first application data processing mode list from the first facsimile machine to the
30 second facsimile machine, said first application mode list containing at least one application data processing mode of the first facsimile machine;
comparing said first application mode list with a second application data processing mode list stored in the second facsimile machine and containing at least one application data processing mode of the second facsimile machine to determine if there is an application data processing mode common to
35 both said first and second application mode lists; and
transferring said data file from the second facsimile machine to the first facsimile machine in said common application data processing mode selected from said first and second application mode lists.
- 40 96. The system of claim 95 wherein said custom mode list includes a data field containing a value indicating the current status of said application capabilities within the first facsimile machine.
97. The method of claim 95 wherein the first facsimile machine transfers said first application mode list to the second facsimile machine upon receipt of an application mode list request command from the second facsimile machine.
- 45 98. A method using first and second computers for controlling communication between the first and second computers, the method comprising the steps of:
(a) transferring a first custom data processing mode list from the first facsimile machine to the second facsimile machine, said first custom mode list containing at least one custom data
50 processing mode of the first computer;
(b) transferring a first application data processing mode list from the first computer to the second computer, said first application mode list containing at least one application data processing mode of the first computer;
55 (c) comparing said first application mode list with a second application data processing mode list stored in the second computer and containing at least one application data processing mode of the second computer to determine if there is an application data processing mode common to both said first and second application mode lists;

- (d) if there is an application data processing mode common to both said first and second application mode lists, transferring a data file from the second computer to the first computer using said common application data processing mode from said first and second application mode lists;
- 5 (e) if there is no common application data processing mode in said first and second application mode lists, comparing said first custom mode list with a second custom data processing mode list stored in the second computer and containing at least one custom data processing mode of the second computer, said first and second custom mode lists having at least one mutually compatible basic data processing mode; and
- 10 (f) transferring said data file from the second computer to the first computer in said mutually compatible data form selected from said first and second custom mode lists.

99. A method using first and second computers for controlling communication between the first and second computers, the first computer having a first custom mode list containing at least a first custom data processing mode, the second computer having a second custom mode list containing at least a second custom data processing mode compatible with the first custom data processing mode, the method comprising the steps of:
- 15 (a) transferring a first application data processing mode list from the first computer to the second computer, said first application mode list containing at least one application data processing mode of the first computer;
- 20 (b) comparing said first application mode list with a second application data processing mode list stored in the second computer and containing at least one extended data processing mode of the second computer to determine if there is an application data processing mode common to both said first and second extended mode lists;
- 25 (c) if there is a common application data processing mode, transferring a data file from the second computer to the first computer using said common application data processing mode selected from said first and second application mode lists;
- (d) if there is no common application data processing mode in said first and second application mode lists, comparing the first custom mode list with the second custom data processing mode list to determine a mutually compatible custom data processing mode; and
- 30 (e) transferring said data file from the second computer to the first computer in said mutually compatible data form selected from the first and second custom mode lists.

35

40

45

50

55

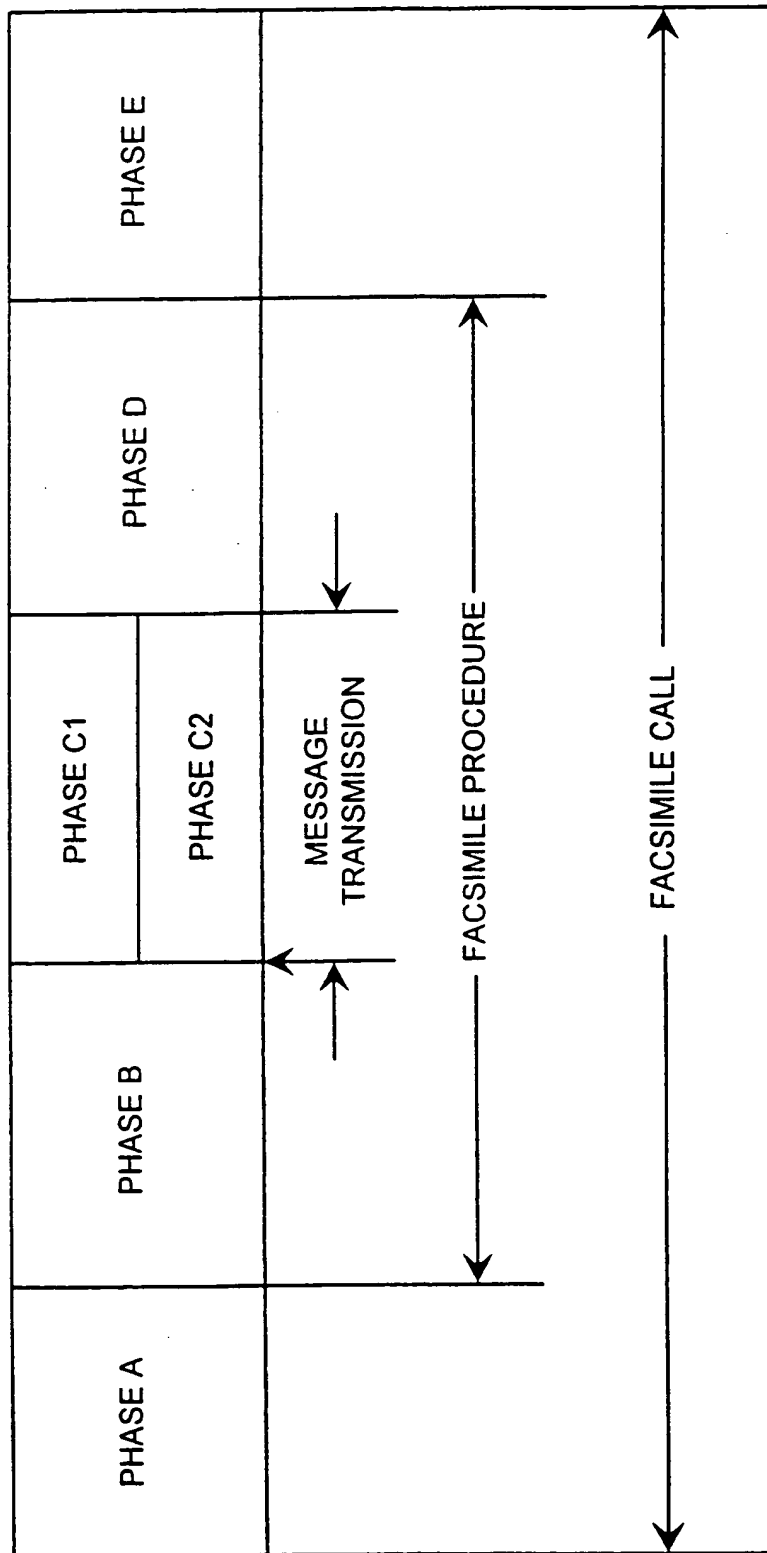
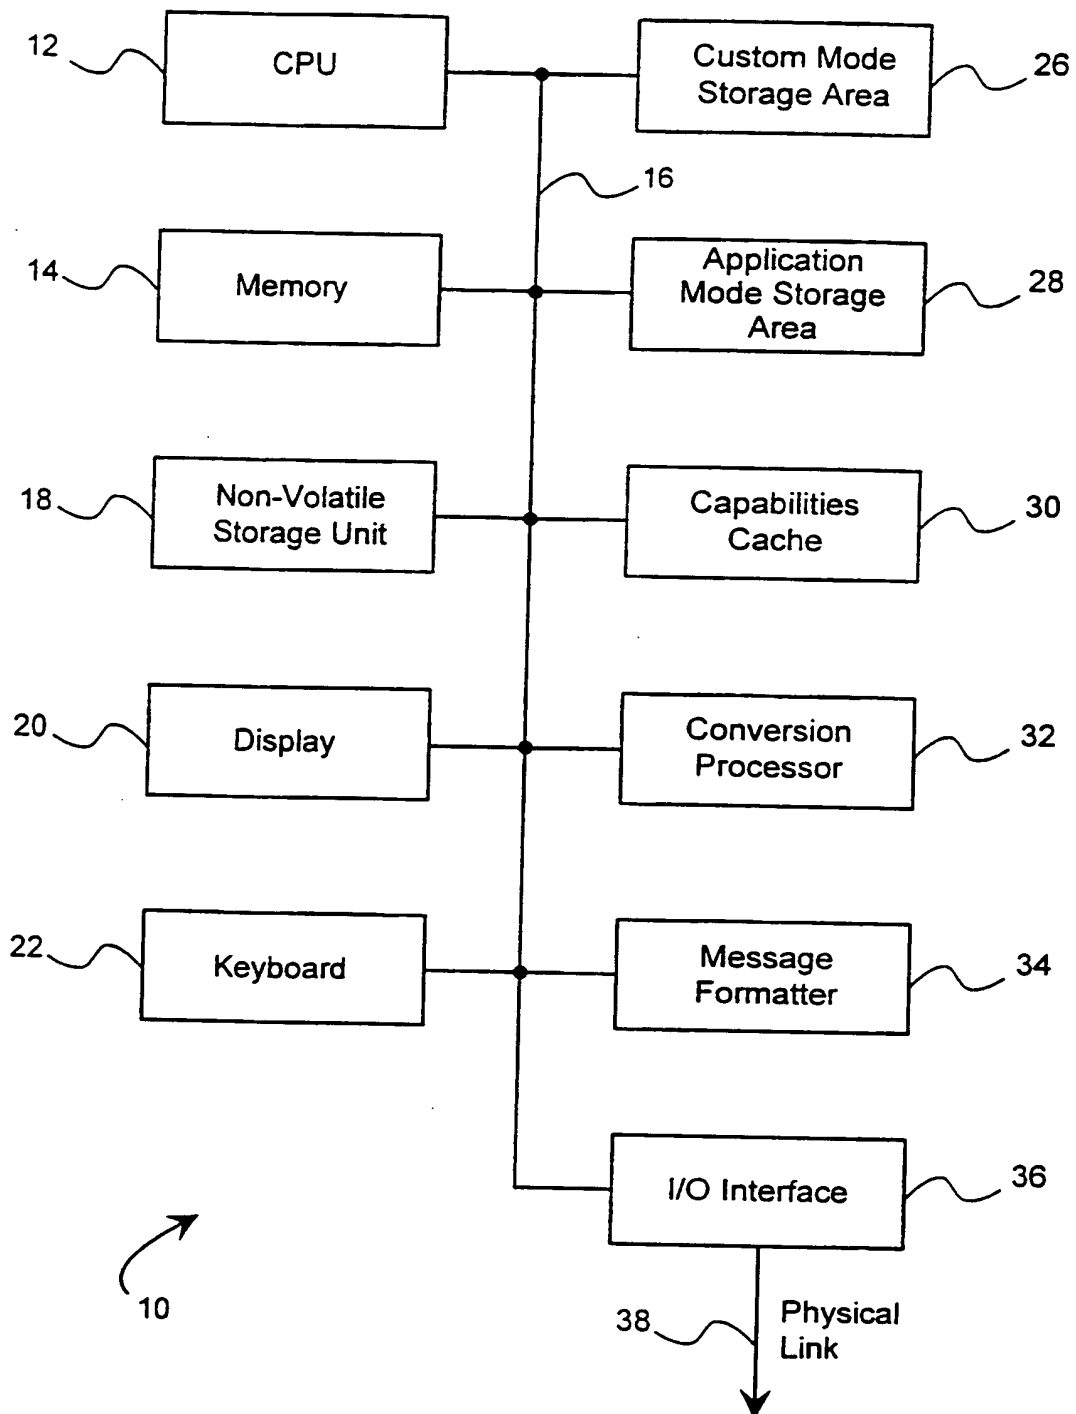


FIG. 1

**FIG. 2**

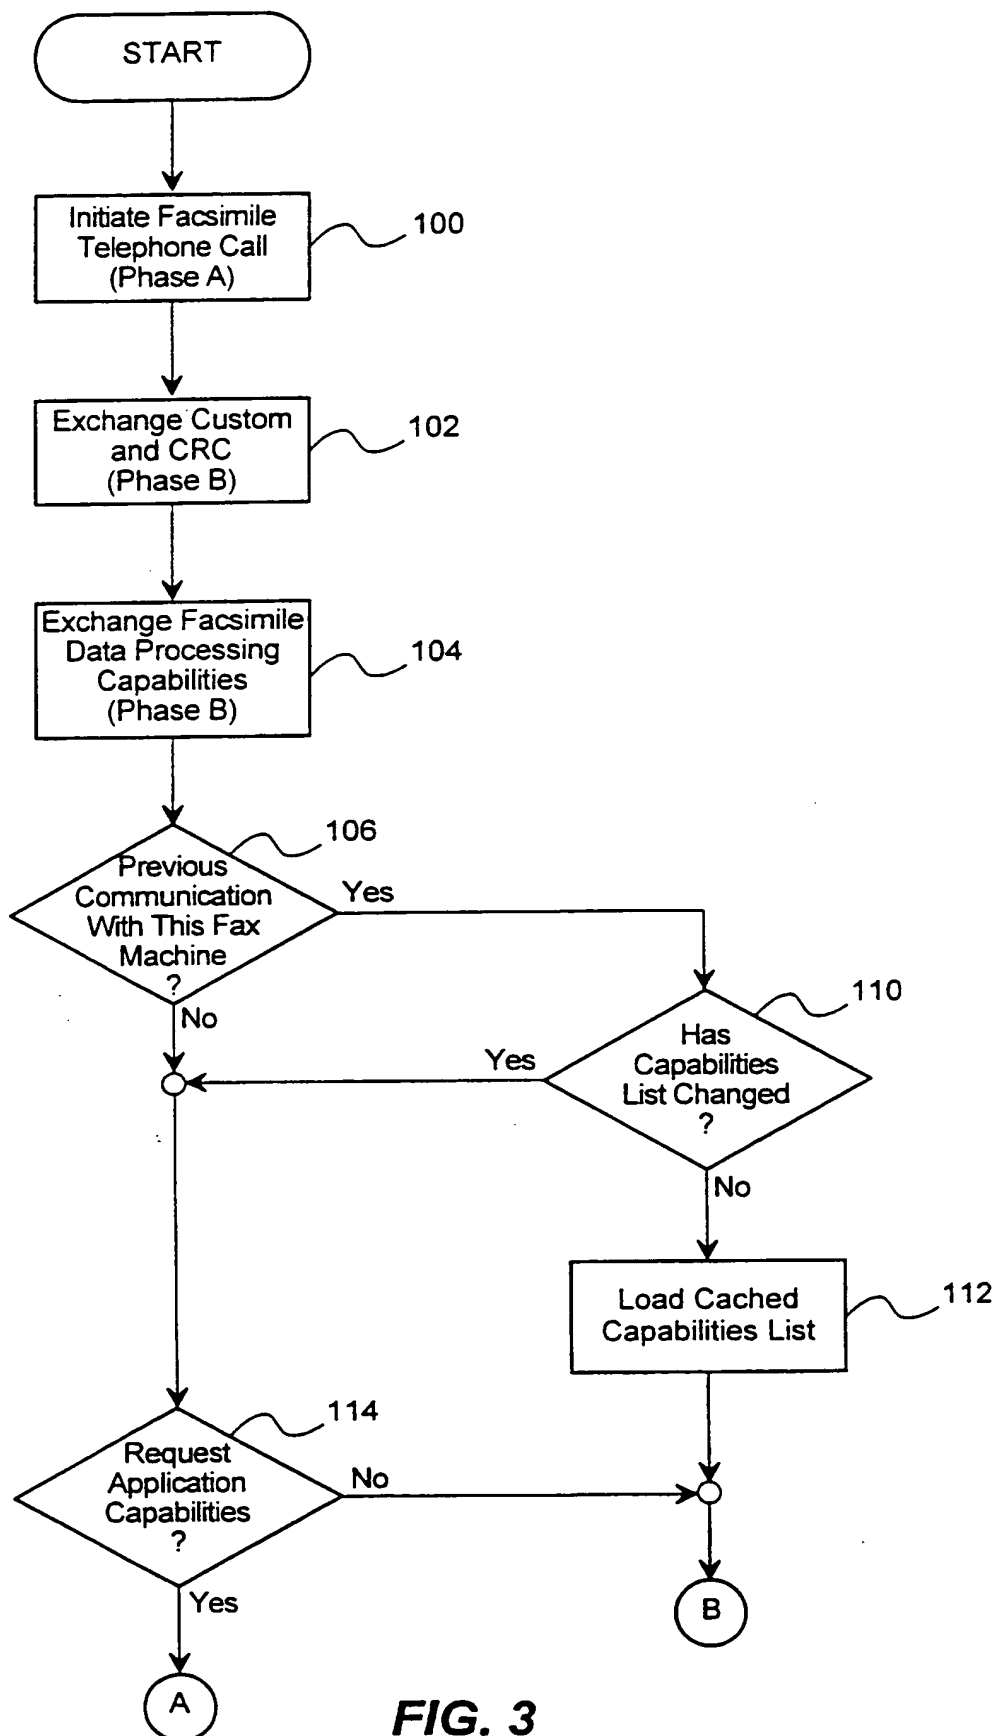
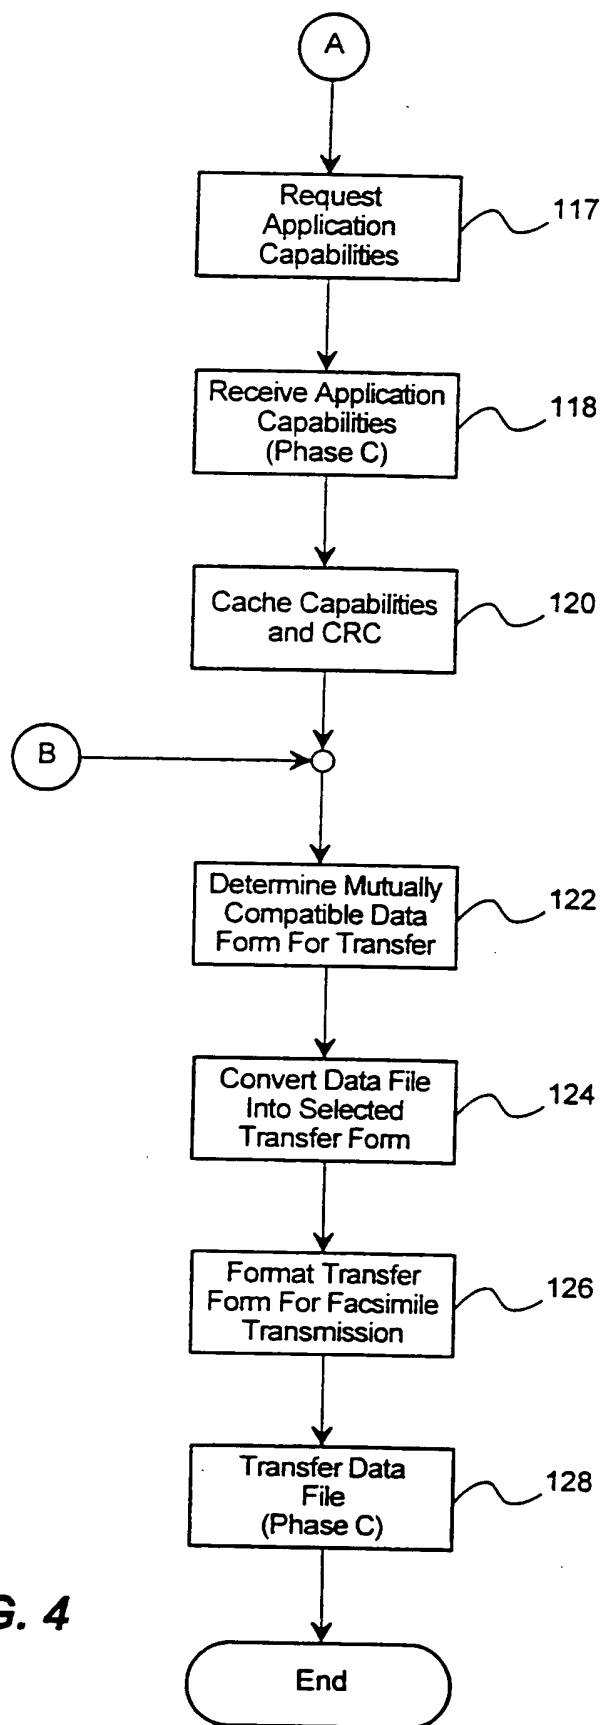


FIG. 3

**FIG. 4**

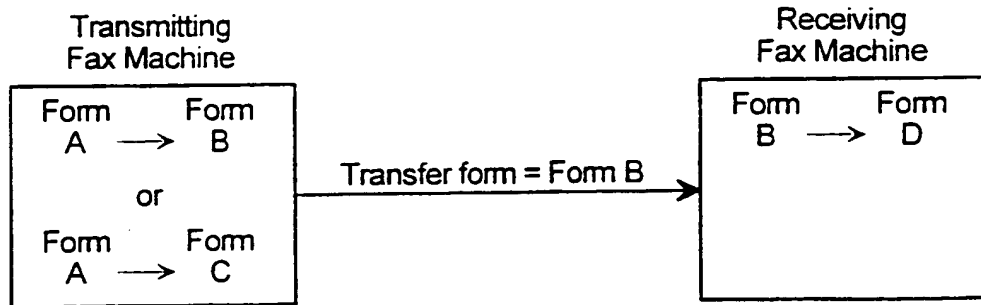


FIG. 5A

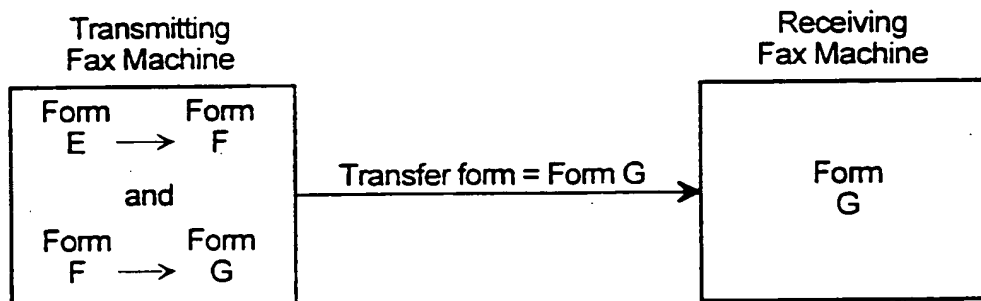


FIG. 5B

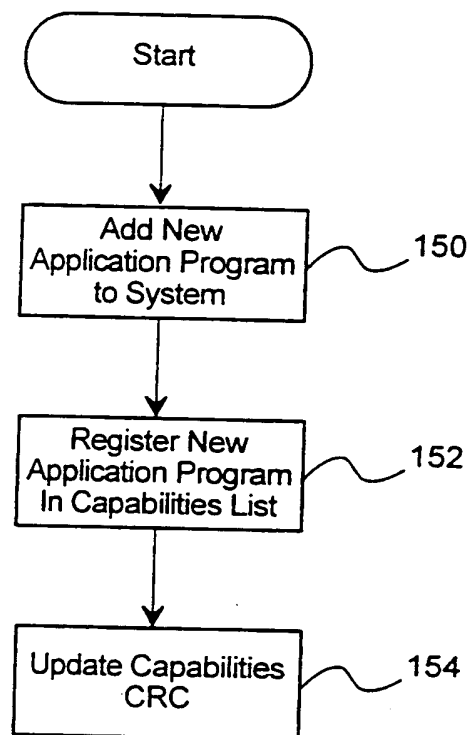


FIG. 6

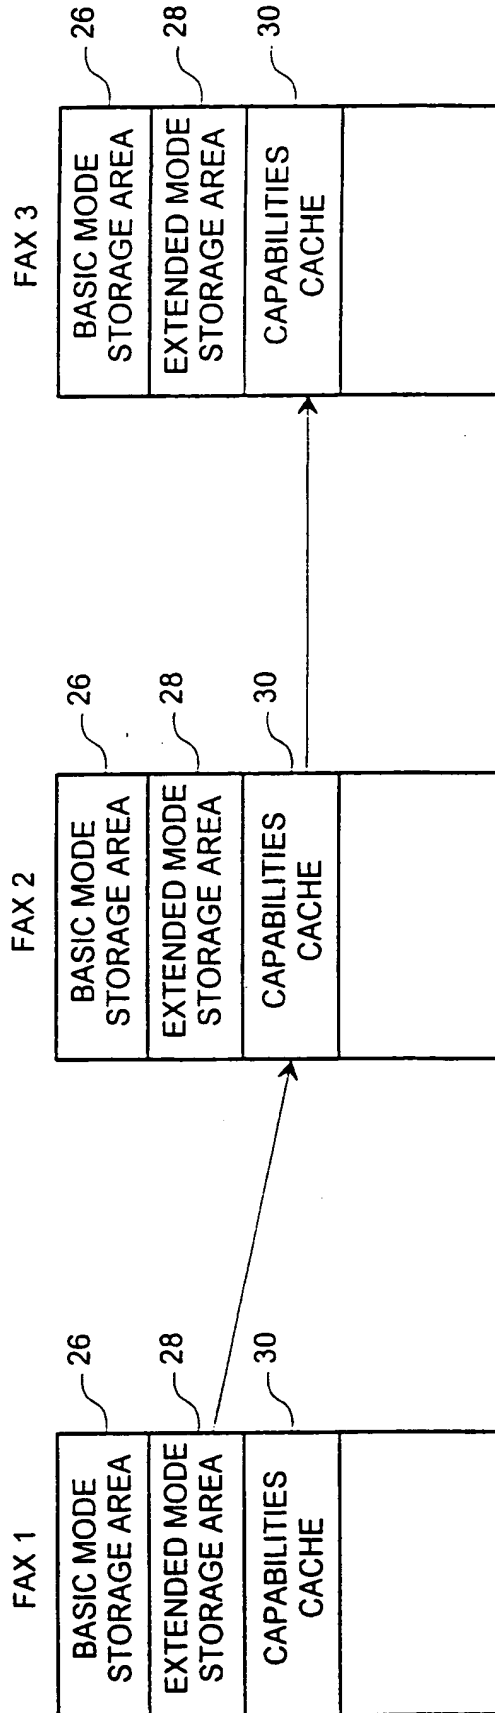


FIG. 7

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



⑪ Publication number:

0 652 668 A3

⑫

EUROPEAN PATENT APPLICATION

⑳ Application number: **94117463.3**

⑤① Int. Cl.⁶: **H04N 1/333**

㉔ Date of filing: **04.11.94**

㉓ Priority: **05.11.93 US 149507**

④③ Date of publication of application:
10.05.95 Bulletin 95/19

⑨④ Designated Contracting States:
DE FR GB

⑨⑥ Date of deferred publication of the search report:
19.07.95 Bulletin 95/29

⑦① Applicant: **MICROSOFT CORPORATION**
One Microsoft Way
Redmond,
Washington 98053-6399 (US)

⑦② Inventor: **Menezes, Arul**
13930 Northeast 13th Street No.6-2
Bellevue,
Washington 98005 (US)
Inventor: **Mathur, Sharad**
14924 Northeast 76th Court
Redmond,
Washington 98052 (US)
Inventor: **Ginsberg, Michael**
4625-148th Avenue Northeast,
Apartment No.PP102
Bellevue,
Washington 98007 (US)



⑦④ Representative: **Patentanwälte Grünecker,**
Kinkeldey, Stockmair & Partner
Maximilianstrasse 58
D-80538 München (DE)

⑤④ **System and method for exchanging computer data processing capabilities.**

⑤⑦ A system and method for exchanging data processing capabilities between computers. The computers exchange capabilities so that data transfer between the computers may be made in the most efficient data format possible for the two computers. A first computer, which will receive a data file, sends a list of data processing capabilities to a second computer, which will transmit the data file to the first computer. The transmitting computer examines the capabilities list of the receiving computer as well as its own capabilities list and determines the most efficient data format for the transfer. The transmitting computer may process the data file into an intermediate format for efficient data transfer so that the

receiving computer will process the intermediate data file into the desired data format. The capabilities list can be cached for future communication between the computers. The system can update the capabilities list and inform other computers whether their cached capabilities list is current. Capabilities can also be forwarded from one computer to another so that a third computer can determine the capabilities of the first computer from the second computer or the capabilities of the second computer from the first computer. The system is readily applicable to facsimile machines where custom and application data processing capabilities can be exchanged.

EP 0 652 668 A3

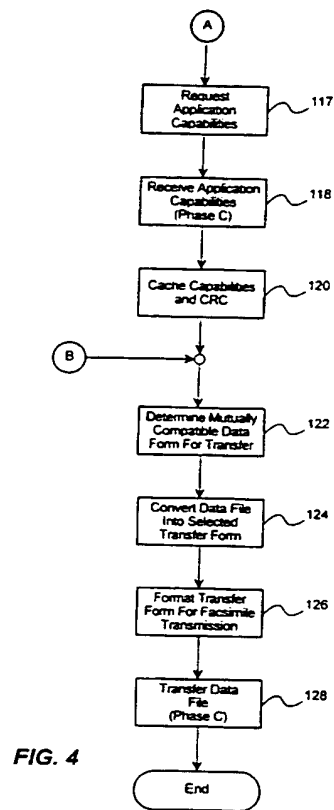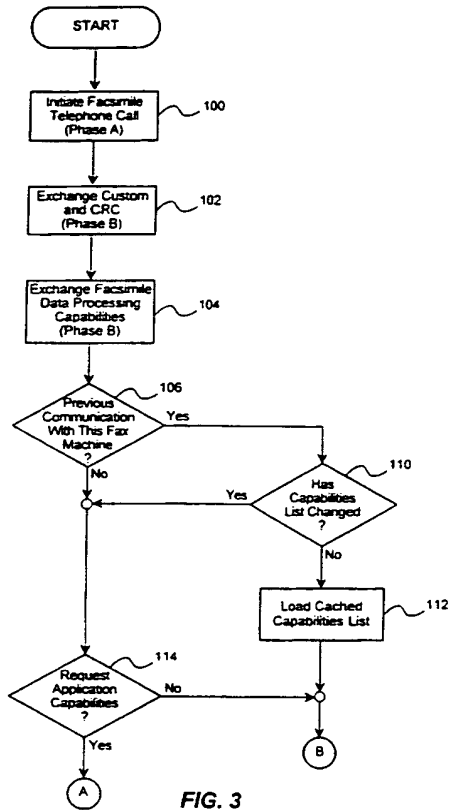



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 11 7463

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	GB-A-2 256 558 (CANON KABUSHIKI KAISHA) * the whole document *	1-4,22, 32, 35-38, 51,52, 85,98,99	H04N1/333
A	US-A-4 000 371 (RICOH CO., LTD.) * the whole document *	1-4,22, 32, 35-38, 51,52, 85,98,99	
A	PATENT ABSTRACTS OF JAPAN vol. 8, no. 176 (E-260) 14 August 1984 & JP-A-59 070 363 (NIPPON DENSHIN DENWA KOSHA) 20 April 1984 * abstract *	13,14, 22,53,87	
A	US-A-5 228 128 (KIM) * the whole document *	32,35, 36,51, 98,99	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04N H04L
A	IBM TECHNICAL DISCLOSURE BULLETIN, vol.32, no.6A, 30 November 1989, NEW YORK US pages 405 - 406, XP000043258 ANONYMOUS 'FAX REROUTE FUNCTION' * the whole document *	40,62,66	
The present search report has been drawn up for all claims—			
Place of search THE HAGUE		Date of completion of the search 31 January 1995	Examiner HAZEL J.F.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document			

EPO FORM 1503 (04/92) (P04021)



European Patent
Office

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet -B-

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respects of which search fees have been paid, namely claims:
- ☒ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims,

namely claims: 1-76, 85-99



EP 94 11 7463 -B-

LACK OF UNITY OF INVENTION - A PRIORI -

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims 1-76,85-99: System and method for exchanging capability information between two facsimile machines or computers
2. Claims 77-84 : System and method for controlling turnaround operations between facsimile machines

THIS PAGE BLANK (USPTO)